

Anritsu envision : ensure

BERTWave™

MP2110A

BERTWave



All In One

4ch BERT+ Sampling Oscilloscope



Reduce cost. Increase productivity.

A single box solution - 28.2 Gbit/s × 4ch BERT + 40-GHz Sampling Oscilloscope for Multi-channel Optical Module Evaluation and 100/200/400-Gbit/s Multi-channel Optical Module Evaluation
BERTWave MP2110A



MP2110A

Multi-channel Optical Module, Device Manufacturing and Development

Data traffic volumes are exploding with the spread of fixed-rate video streaming and cloud services. As a result, there is a need for optical interfaces for transmission equipment supporting speeds of more than 10 Gbit/s as 100 GbE and even 200 GbE and 400 GbE networks are deployed. However, there are increasing requests for less-expensive optical interfaces due to major problems with how to increase line productivity and cut costs.

The BERTWave MP2110A is an all-in-one instrument with built-in BERT (Bit Error Rate Tester) and Sampling Oscilloscope (Eye pattern analysis) designed for manufacturing inspection of 100, 200, and 400G optical modules. It helps increase line productivity and cuts costs.

All In One

All-in-one max. 4ch 28.2 Gbit/s BERT + max. 4ch sampling oscilloscope

250
ksamples/s

Captures 1 million samples in about 5 seconds

Low Cost

Integrated BERT and sampling oscilloscope reduce instrument capital costs

-15
dBm
Sensitivity

Measures optical signals attenuated by peripherals such as optical switches

NRZ/PAM4 Analysis

Easy, fast and high-sensitivity analysis of PAM4 signals including TDECQ with support for clock recovery

Shorter Measurement Times

High-speed Sampling Oscilloscope (250 ksamples/s)
Multi-channel Measurement (4ch BERT and 4ch Sampling Oscilloscope)

More Accurate Performance

Sampling Oscilloscope

- Bandwidth
 - Optical: 35 GHz (SMF), 25 GHz (MMF)
 - Electrical: 40 GHz
- High Sensitivity: -15 dBm (typ., SMF)
- Low-jitter: 200 fs rms (typ.)

BERT

- Low-jitter PPG: 600 fs rms (typ.)
- High-Sensitivity ED: 25 mV (typ.)

Built-in PC for Stable Operation

Efficient Measurement Systems

Easy configuration of flexible measurement system using All-in-one and discrete instruments
Slashes instrument capital costs by up to about 50% depending on selected configuration
Easy measurement system configuration using sample program
Both NRZ and PAM4 signals are supported, and there is a built-in Clock Recovery Unit for Sampling Oscilloscope.

Supported Applications: Evaluation of physical-layer performance for 25G/50G/100G/200G/400G optical transport modules, optical cables, and associated parts used by data centers, Core/Metro networks, 4G/5G mobile backhaul, and 5G mobile fronthaul


Transmission Paths: Ethernet, eCPRI/RoE, CPRI, SDH/SONET, OTN, InfiniBand, Fibre Channel
Optical Transceiver Modules: SFP28, QSFP28, CFP2/4/8, SFP56, QSFP56, OSFP, QSFP-DD
Cables: Active Optical Cables (AOC), Direct Attach Cables (DAC)
Devices: TOSA, ROSA, High-Speed Optical Engine, PHY, Driver ICs

Configuration of Efficient Measurement Systems


Integrated BERT and Sampling Oscilloscope

Previous measurement systems were extremely complex due to the need for a separate BERT as the signal source and a sampling oscilloscope for Eye pattern analysis. Incorporating a BERT and sampling oscilloscope into the All-in-one BERTWave MP2110A greatly simplifies measurement system configuration.

Installing the BERT and sampling-oscilloscope options for up to 4ch in one unit makes it easy to implement simultaneous TRx measurements of optical modules, such as multichannel QSFP28, and devices using an easily configured and controlled measurement system. This helps cut growing measurement times as the number of channels increases with development of multichannel optical modules and devices.

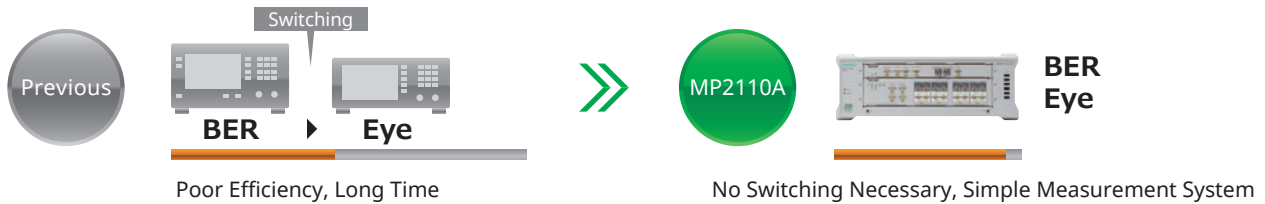

With a BERT and sampling oscilloscope in one box, measurement results can be captured all at once along with simultaneous Eye pattern display. As a result, all the measurement results needed to evaluate multi-channel optical modules and devices can be seen at a glance, reducing measurement times by large margins.

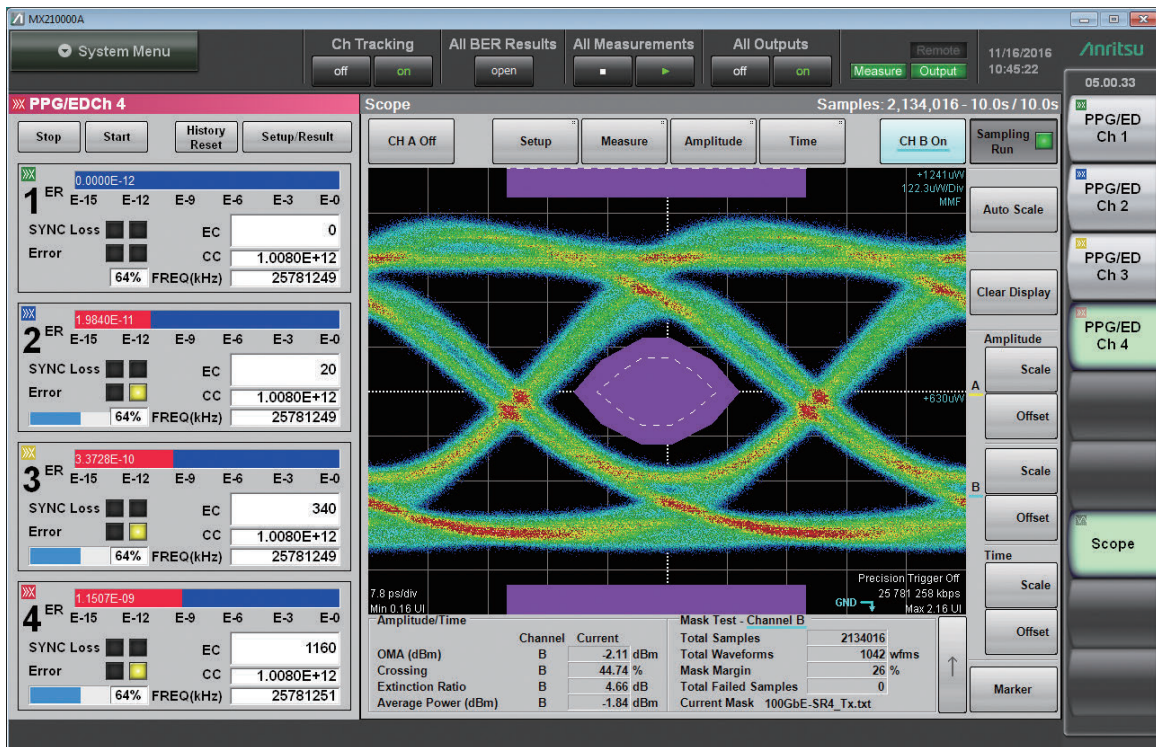

BER measurement results (left) and Eye Pattern analysis results (right) are displayed simultaneously.


Simply setting one channel of the MP2110A sets all channels simultaneously.

Operation is easy with simple settings and user interface. Remote commands are backwards-compatible with all BERTWave series, such as the MP2100B, facilitating instrument upgrades.

Configuration of Efficient Measurement Systems


Supports Both Simultaneous Measurement of All Channels and Separate Measurement of Each Channel

As well as all-at-once simultaneous measurement of all channels using the sampling oscilloscope and BERT, individual channels can be measured separately. An evaluation system matching the application can be configured easily because both multichannel modules and multiple single-channel modules can be measured all at once.

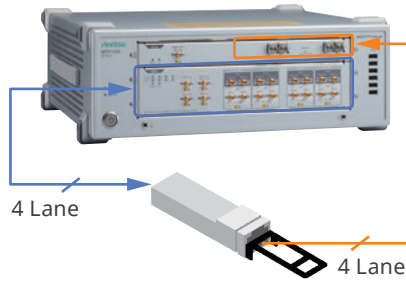

All-at-once testing of 4-waveform module using simultaneous measurement of all channels


Shorter test times increase throughput

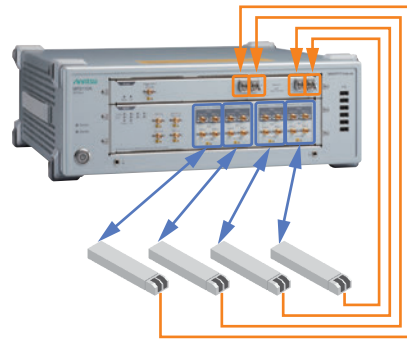

Parallel testing of four separate 1-waveform modules using separate measurement of each channel

Reduced cost per channel cuts capital investment

Supports Both Test Methods

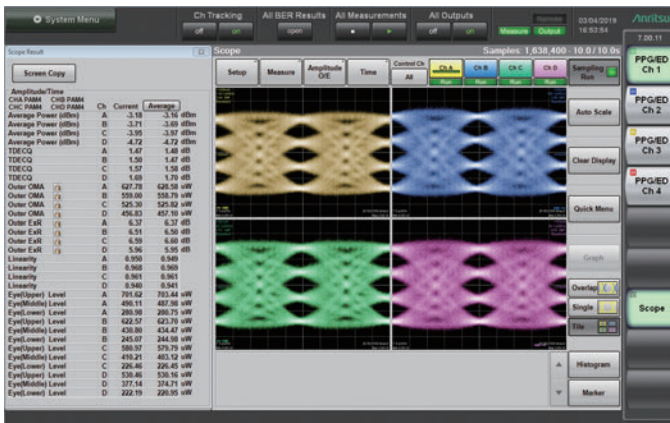

4ch PAM4 TDECQ Measurement




4ch NRZ Mask Margin Measurement


Configuration of Efficient Measurement Systems

Built-in NRZ/PAM4 Clock Recovery Unit (Option 054)

Usually, a sampling oscilloscope requires input of a trigger clock signal. This trigger clock can be recovered from the Data signal using this Clock Recovery Unit (CRU). The built-in CRU helps cut capital infrastructure costs by easy configuration of a measurement system with no complex cable connections.

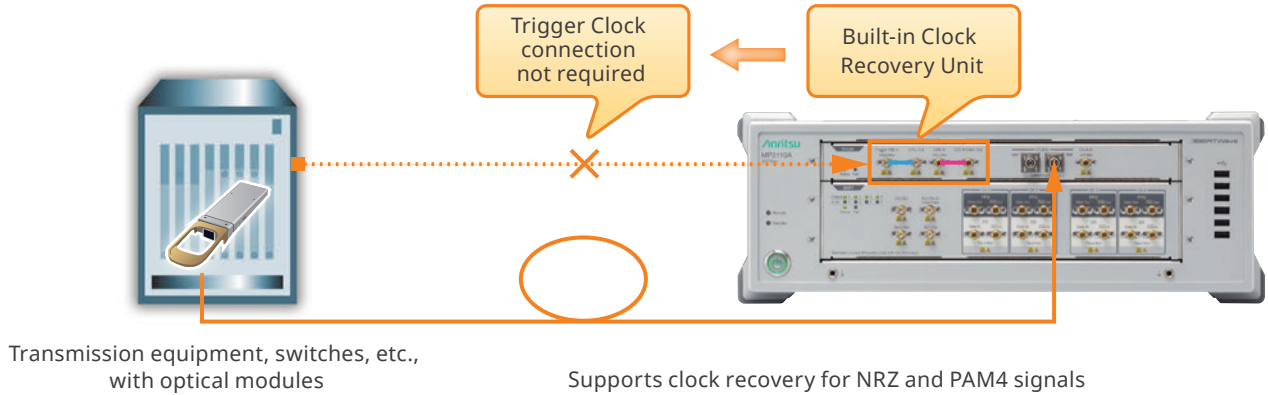

The built-in CRU supports clock recovery for 25.5 Gbaud to 28.2 Gbaud NRZ/PAM4 signals. Cuts loss from internal splitters, helping minimize the impact on monitored waveforms; useful for monitoring waveforms requiring high-sensitivity measurement.

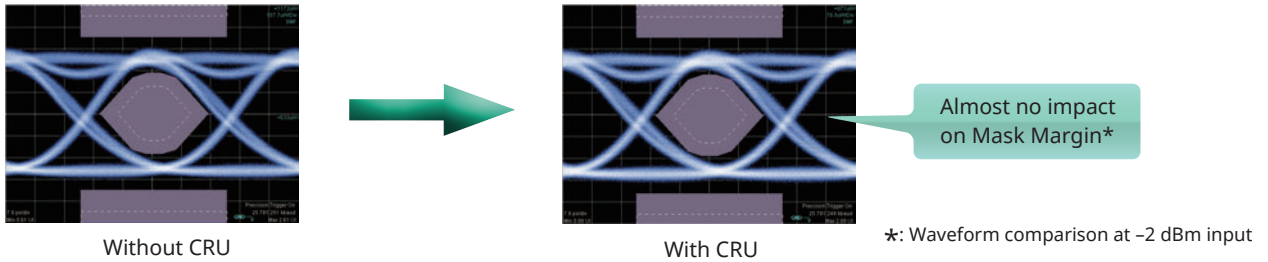


High-Speed Sampling and Fast Mask Margin Tests

The MP2110A supports high-speed sampling at 250 ksamples/s. Measurement of 1 million samples can be completed in about 5 s, cutting pattern analysis time by about 65% compared to previous instruments.



The MP2110A requires no external PC controller, because it has a built-in PC for measurement processing. It supports high-speed processing irrespective of external PC controller specifications.

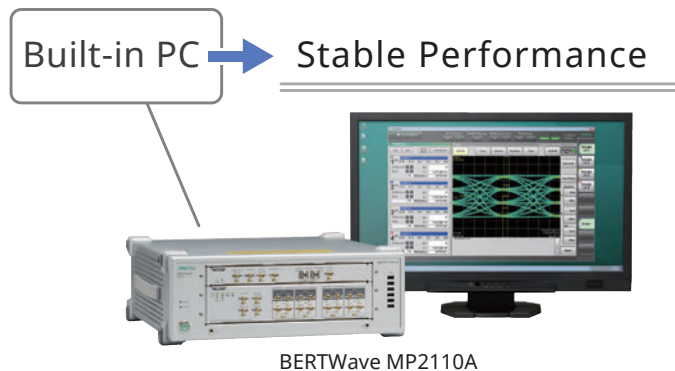


Assured Accurate Performance

Sampling Oscilloscope Functions


The MP2110A sampling oscilloscope has all the performance necessary for measuring optical modules such as 100 GbE, OTU4, etc., and optical devices used by optical modules.

- Bandwidth:
Optical: 35 GHz (SMF), 25 GHz (MMF)
Electrical: 40 GHz
- High Sensitivity: -15 dBm (typ. SMF)
- Low Noise: 3.4 μ W (typ. SMF)
- Low-jitter: 200 fs rms (typ.)

The low-noise and high-sensitivity O/E plus low-jitter trigger support more accurate measurements of narrow Eye openings of PAM4 signals as well as attenuated signals passing through optical switches, etc., helping improve production-line yields.

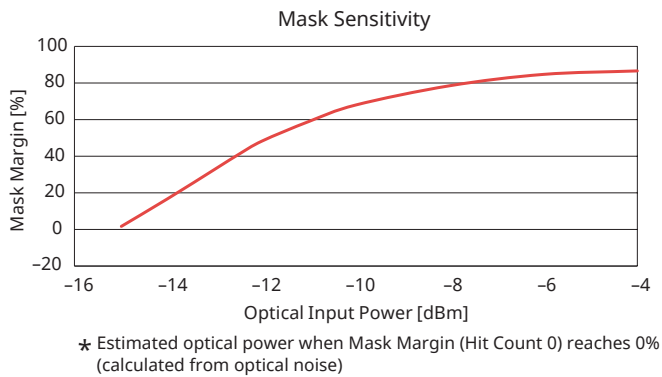

In comparison to conventional instruments, the wideband O/E draws accurate patterns of the characteristics of directly driven optical signals and optical modules for long-distance transmissions.

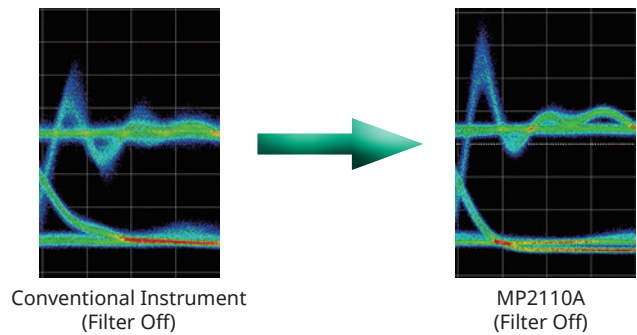

BERT


Wideband Operation Frequency

In the standard configuration, the MP2110A BERT operates at bit rates of 24.3 Gbit/s to 28.2 Gbit/s. This range can be extended optionally to support bit rates of 9.5 Gbit/s to 14.2 Gbit/s, enabling use for various applications including 10 GbE and 100 GbE.

PPG/ED Supported Bit Rates	Application Example
24.3 Gbit/s to 28.2 Gbit/s	32G Fibre Channel, CPRI (Option 10), InfiniBand EDR, 100 GbE, 100 GbE FEC, OTU4
9.5 Gbit/s to 14.2 Gbit/s (Option 093)	InfiniBand FDR/QDR, Fibre Channel (16G, 10G, 10G FEC), 10 GbE (WAN, LAN), 40 GbE (4 x 10 Gbit/s), CPRI (Option 8, 9), OC-192/STM-64, OC-192/STM-64 FEC (G.975), OTU1e, OTU2, OTU2e

Excellent PPG/ED Performance


The MP2110A PPG has a low data jitter of 600 fs rms (typ.) for accurate measurement of the characteristics of optical modules, optical devices, etc. Additionally, the 25 mV (typ.) ED supports BER measurement of low-amplitude signals resulting from transmission path losses, helping improve DUT yields.

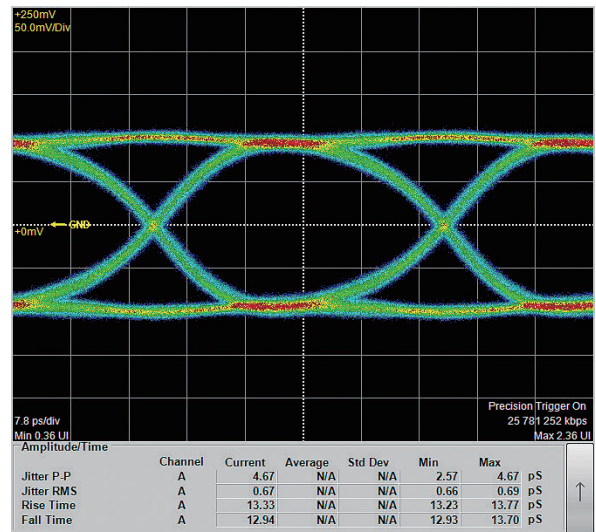

Typical PPG Waveform
25.78125 Gbit/s Electrical Loopback Waveform
(at PRBS 31, 200 mV Amplitude, and Precision Trigger Option On)

Full Range of Measurement Functions (Sampling Oscilloscope)

Sampling oscilloscope supports both NRZ and PAM4 analysis.

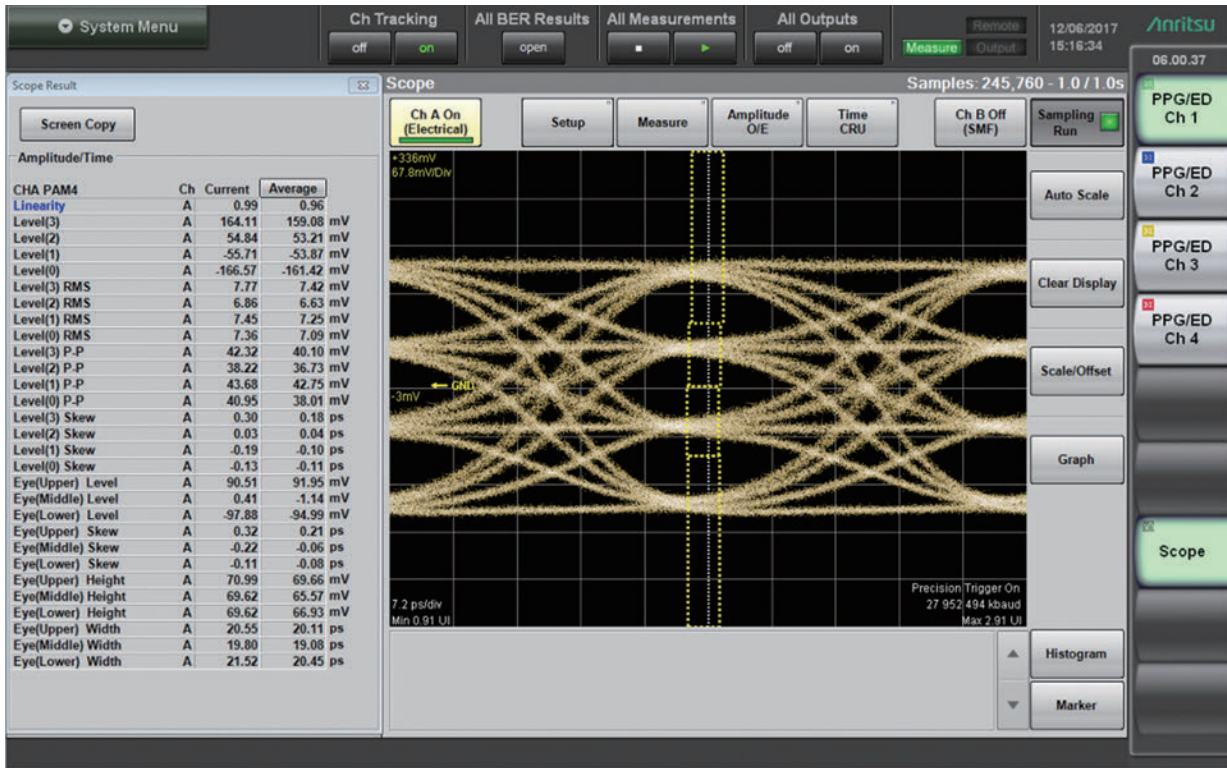

Selection of displays for up to 32 measurement items supports confirmation of multiple PAM measurement results at one screen. Additionally, all measurement results, including items not displayed on-screen, can be captured simultaneously using remote control.

NRZ

- Average Power (dBm, μ W)^{*1}
- Mask Margin (%)
- Extinction Ratio (dB)^{*1}
- OMA (dBm, μ W)^{*1}
- VECP (dB)^{*1}
- One Level, Zero Level
- Eye Amplitude, Eye Height, Eye Height Ratio
- Crossing (%)
- SNR
- Jitter (P-P, RMS) (ps)
- Rise Time, Fall Time (ps)
- Eye Width (ps)
- DCD (%)
- RIN OMA
- TDEC^{*2}
- TJ (J2, J4, J9, User Defined BER), Eye Opening^{*3}
- RJ (d-d), RJ (rms)^{*3}
- DJ (d-d)^{*3}
- PJ (p-p), PJ Frequency^{*3}
- DDJ (p-p), DDPWS^{*3}
- DCD^{*3}
- ISI (p-p)^{*3}

PAM4 (Option 095)

- Average Power (dBm, μ W)^{*1}
- TDECQ (dB), Partial TDECQ, Ceq^{*1}
- Outer Extinction Ratio (dB)^{*1}
- Outer OMA (μ W)^{*1}
- Linearity
- Levels 0/1/2/3
- Levels P-P, RMS 0/1/2/3
- Level Skews 0/1/2/3 (ps)
- Eye Levels Upper/Middle/Lower
- Eye Heights Upper/Middle/Lower
- Eye Widths Upper/Middle/Lower (ps)
- Eye Skews Upper/Middle/Lower (ps)
- RIN OMA


*1: Optical signals only
 *2: No IEEE 12.6 GHz hardware filter
 *3: Option 096

Full Range of Measurement Functions (Sampling Oscilloscope)

NRZ Mask Margin Measurement


Testing is simple because Mask Margin tests are performed automatically. Furthermore, since the time required for Mask Margin tests is only about 1 second, line productivity is improved because standards-compliant measurements are performed at high speed in a shorter time.

- Automatic measurement within 1 second
- Real-time margin measurements
- Selectable Count and Rate at Mask Hit

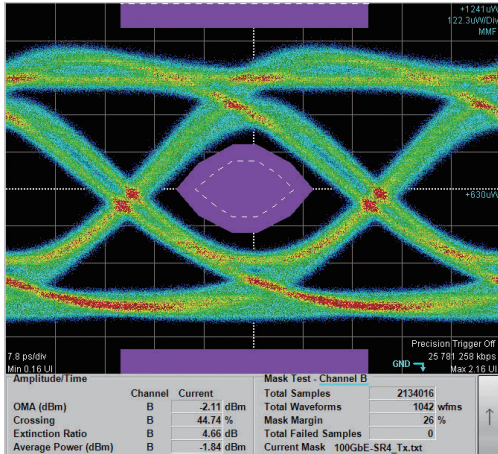

PAM4 TDECQ Measurement (Option 095)

Easy capture of measurement results without complex settings. The low-noise (3.4 μ W, typ.) high-sensitivity oscilloscope supports high-reproducibility measurement of even small Eye margin PAM4 signals. High-speed sampling shortens the time required for data collection for TDECQ analysis. Shorter measurement times help improve productivity even at PAM4 signal evaluation.


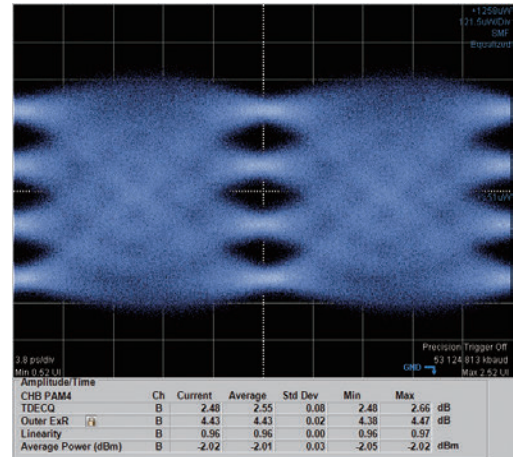


53 Gbaud PAM4 TDECQ Measurement

NRZ Jitter Analysis (Option 096)


This option supports separate analysis of Jitter components such as TJ, DJ, RJ, etc., with display in various graph formats.

- Fast, easy J2/J9/etc. measurements for manufacturing inspections (Eye Mode)
- Detailed analyses for DJ (Advanced Jitter Mode)
- Simultaneous Jitter Analysis and Eye Mask tests help cut measurement times

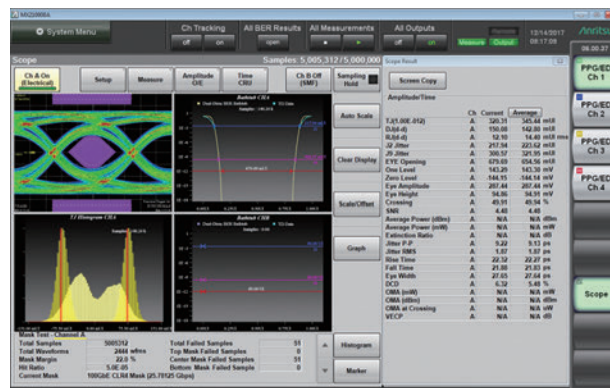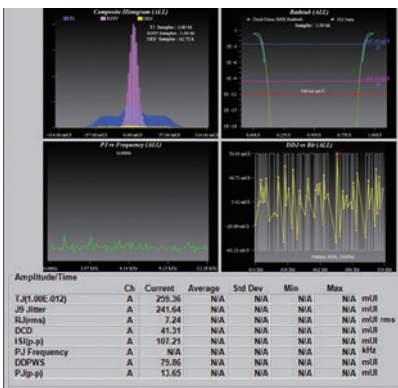


Histogram Measurement

Troubleshooting is made easier because waveform data component analysis can be performed using the mean, standard error, and scatter within the set data distribution.

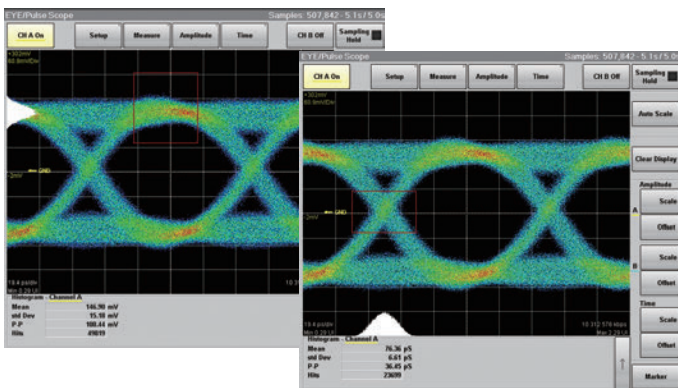


Reference Trace Function

Saving measured waveform data for reference enables comparison of current data with previous data.

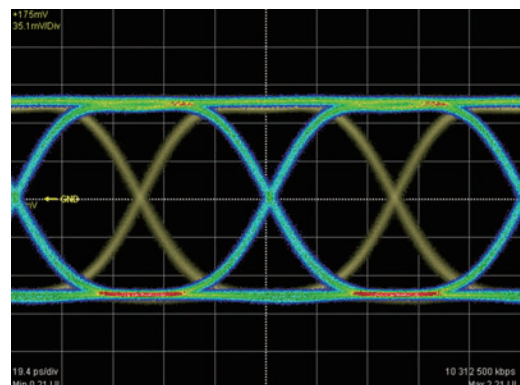

Application Examples


Multi-channel Optical Module Evaluation

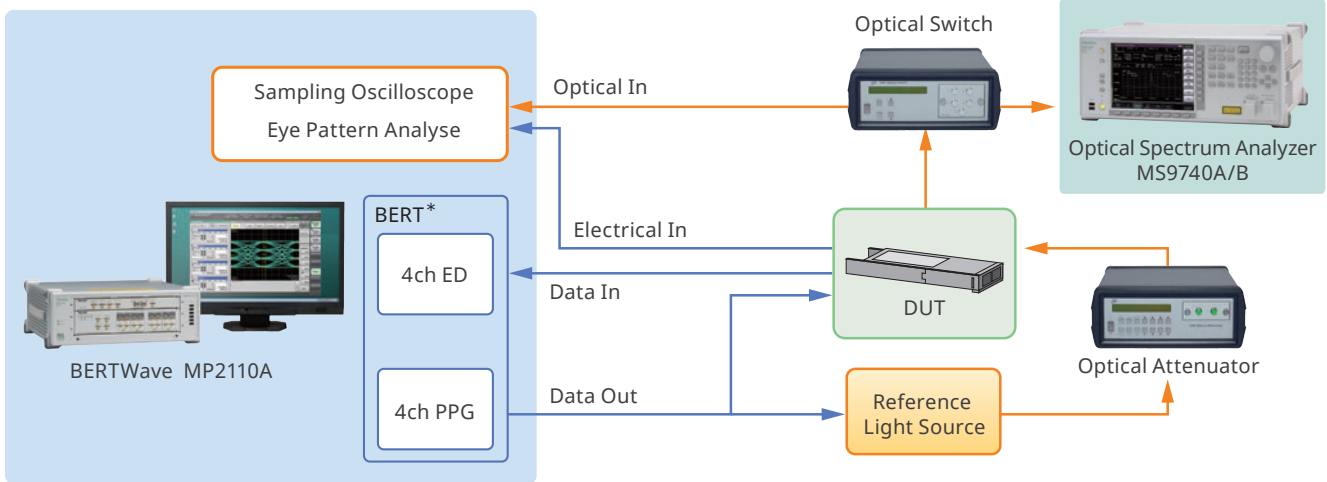

Required Test Items

- Rx Electrical Signal Eye Pattern Analysis (NRZ: Mask Margin, Jitter, Tr/Tf, etc.)
- Tx Optical Signal Eye Pattern Analysis (Optical Power, NRZ: Mask Margin, Jitter, Tr/Tf, Extinction Ratio, PAM4: TDECQ, Outer OMA/Extinction Ratio, Linearity etc.)
- Rx Signal Rx Sensitivity Test (BER Measurement)

TOSA/ROSA Evaluation

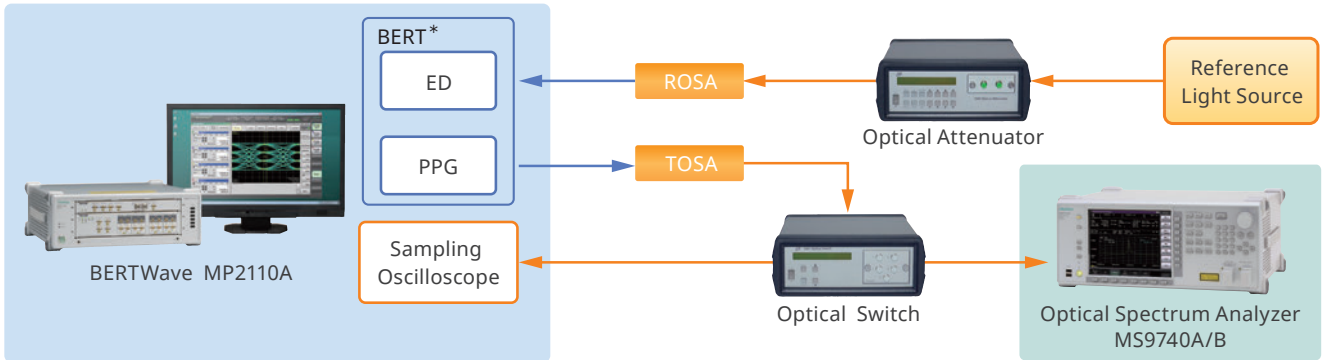

Required Test Items

- Tx Optical Signal Eye Pattern Analysis (Optical Power, NRZ: Mask Margin, Jitter, Tr/Tf, Extinction Ratio, PAM4: TDECQ, Outer OMA/Extinction Ratio, Linearity etc.)
- Rx Signal Rx Sensitivity Test (BER Measurement)

✱: Use MP1900A/MP1800A PPG/ED, etc., at PAM4 signal evaluation.

Optimized Measurement Costs

With All-in-one simultaneous BER measurements and Eye pattern analysis, the MP2110A slashes capital costs by eliminating the need to purchase a separate BERT and sampling oscilloscope. Additionally, easy expandability to up to a 4ch BERT and an optical 4ch sampling oscilloscope supports simultaneous BER measurement at the Rx side of optical modules as well as optical waveforms at the Tx side, slashing multi-channel optical module measurement times by up to 65%.

Tx/Rx Signal Mask Margin Test, Rx Signal Eye Pattern Analysis (Jitter, Tr/Tf, etc.), Tx Signal Eye Pattern Analysis (Jitter, Tr/Tf, Extinction Ratio, etc.)


The MP2110A high sampling speed of up to 250 ksamples/s and built-in automatic Mask Margin test function cut Mask Margin test times.

Rx Signal Reception Sensitivity Test (BER Measurement)

The MP2110A BERT has a built-in PPG with a low data Jitter of just 600 fs rms (typ.) plus an ED with a high sensitivity of 25 mV (typ.). This excellent ED performance improves line yields by supporting BER measurement of low-amplitude signals after passage through the transmission path.

BERTWave MP2110A Application Examples

Active Optical Cables (AOC)/Direct Attach Cables (DAC) Evaluation

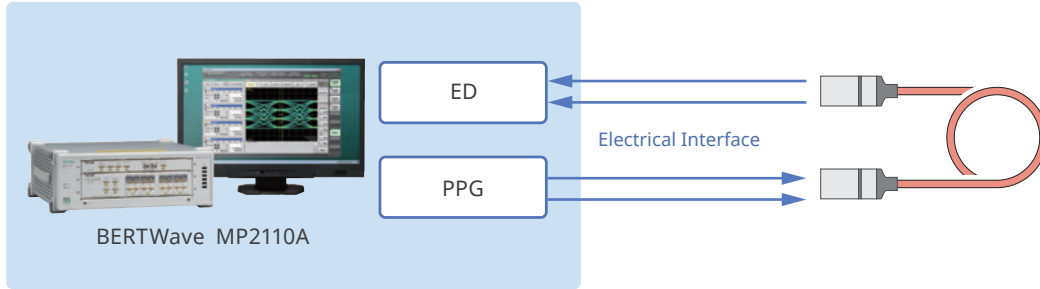

Required Test Items

- 4ch Simultaneous BER Measurement (Crosstalk Test)
- Differential Electrical Signal Eye Pattern Analysis
- Differential Electrical Signal Jitter Analysis

4ch Simultaneous BER Measurement (Crosstalk Test)

Expanding the BERTWave series BERT to up to 4ch supports All-in-one simultaneous Tx/Rx measurements of high-speed, multi-channel AOC and DAC devices now becoming common as well as identification of crosstalk interference. Furthermore, Tx signal Eye pattern analysis is supported by installing the sampling oscilloscope option.

Excellent BERT Performance


The MP2110A BERT has a built-in PPG with a low data jitter of just 600 fs rms (typ.) plus an ED with a high sensitivity of 25 mV (typ.). The optical module/device can be sent a signal close to the DUT characteristics using this PPG feature, and BER measurement of low-amplitude signals after passing through the transmission path is also supported.

Differential Electrical Signal High Speed Eye Pattern/Automatic Mask Margin Tests

Eye pattern analysis of differential electrical signals is supported by installing MP2110A-021. Moreover, the MP2110A high sampling speed of up to 250 ksamples/s and built-in automatic Mask Margin measurement function cut Mask Margin test times. Moreover, installing Option 096 supports jitter analysis of input signals.

BERTWave MP2110A Panel Layout

Front Panel

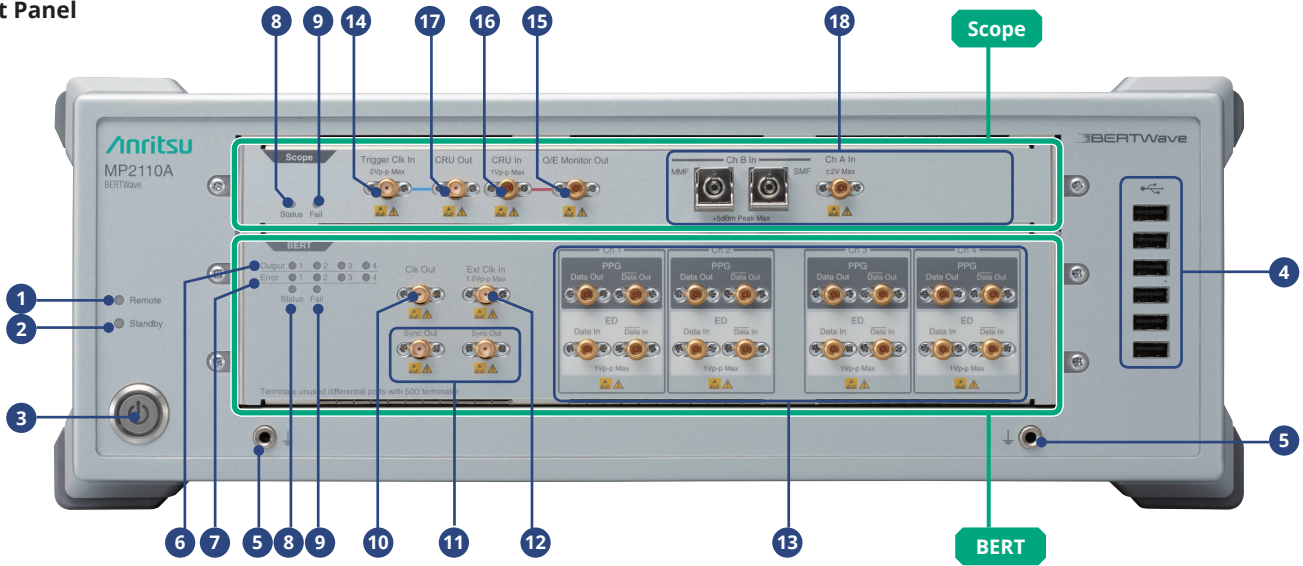

- 1 Remote Lamp**
Lit green while MP2110A under remote control.
- 2 Standby Lamp**
Lit orange while power supplied to MP2110A.
- 3 Power Switch**
Lit green while MP2110A powered-on; flashes during shutdown.
- 4 USB Connector**
USB 2.0 connector for connecting peripheral accessories, such as mouse, keyboard, etc.
- 5 Frame Ground**
For connecting wrist strap and DUT.
- 6 Output Lamp**
Lit green during signal output from PPG connector.
- 7 Error Lamp**
Lit orange at following condition at ED.
 - Unable to synchronize pattern (Sync Loss)
 - Bit error detected
- 8 Status Lamp**
Lit when remote command received at normal operation
Lit green at BERT
Lit green, red or orange at Sampling Oscilloscope (color indicates Trigger Clock input status)
 - Green: Trigger Clock detected normally
 - Red: No trigger Clock detected — check signal input at Trigger Clock Input connector
 - Orange: Trigger Clock input signal out of specified frequency range
- 9 Fail Lamp**
Lit red when hardware fault detected.
This may light briefly at power-on, but there is no abnormality.
- 10 Clock Output Connector (SMA)**
Outputs divided clock.
- 11 Sync Clock Output Connector (SMA)**
Outputs PPG Sync clock.
Outputs PPG Sync clock (inverted)*.
- 12 External Clock Input Connector (SMA)**
For input of external clock.
- 13 PPG Output*/ED Input Connector (K)**
Photograph shows configuration with Option 014 (4ch) installed; Option 011 adds 1ch and Option 012 adds 2ch.
- 14 Trigger Clock Input Connector (SMA)**
For trigger input.
- 15 O/E Monitor Output (K) (Option 054, Optical channel installed)***
Connect the standard accessory U-link coaxial cable (K) to the CRU In connector for use. Always fit the standard accessory coaxial terminator when not connected.
* The signal cannot be monitored correctly without termination.
- 16 Clock Recovery Unit Input (K) (Option 054)**
- 17 Clock Recovery Unit Output (SMA) (Option 054)**
Connect the standard accessory U-link coaxial cable (SMA) to the Trigger Clk In connector for use.

*: Fit the accessory Terminator when not connected.

BERTWave MP2110A Panel Layout

18 Channel A/B/C/D Input (K)

This is the oscilloscope signal input. The connector type differs as follows depending on the option. The electrical channel uses a K-connector. The optical channel SMF and MMF can be switched.


Option 021
(Electrical 2ch)




Option 033/043
(Electrical 1ch + SMF/MMF 1ch)




Option 035/045
(SMF 1ch)



Option 036/046
(MMF 1ch)



Option 032/042
(SMF/MMF 2ch)



Option 030/040
(SMF 4ch)



Option 039/049
(MMF 4ch)



Back Panel



19 Display Port

For connecting external monitor supporting Display Port specification.

20 HDMI

For connecting external monitor supporting HDMI specification.

21 USB 3.0

For connecting accessories such as keyboard, mouse, external hard disk.

22 Ethernet

For connecting PC or network to control MP2110A remotely.

23 Frame Ground Terminal

For connecting wrist strap and DUT.

24 GPIB Connector

For connection to PC to remote control MP2110A.

25 Power Inlet

For connecting accessory power cord.

BERTWave MP2110A Specifications

Common

Remote Interfaces	Ethernet, GPIB	
Peripheral Devices	HDMI, Display Port, USB3.0 (4 ports on rear panel), USB2.0 (6 ports on front panel), Ethernet (2 ports, 10/100/1000 Base-T), Line-Out, Mic ✱ Screen output requires a display with a resolution of 1280 × 800 or higher	
OS	Windows Embedded Standard 7	
Internal Storage devices	SSD, 60 GB or more	
Power Voltage	100 Vac to 240 Vac, (100 Vac/200 Vac System Auto-switching), 50 Hz/60 Hz	
Power Consumption	≤300 VA	
Operating Temperature	+5° to +40°C	
Storage Temperature	-20° to +60°C	
Dimensions	422 (W) × 142.5 (H) × 389.4 (D) mm (excluding projections)	
Mass	<11 kg	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, EN50581

BERT (shared PPG/ED)

Internal Clock	Frequency: 10 MHz Frequency Accuracy: ±10 ppm (1 hour after power-on, design guaranteed) Bit Rate Offset: ±100 ppm (common to all channels)
External Clock Input	Connector: SMA (f) Termination: 50Ω, AC coupled Amplitude: 0.2 Vp-p to 1.6 Vp-p Waveform: Square Wave or Sine Wave Division: 1/16 (at operating bit rate of 9.5 Gbit/s to 14.2 Gbit/s) 1/40 (at operating bit rate of 24.3 Gbit/s to 28.2 Gbit/s)
Clock Output	Connector: SMA (f) Termination: 50Ω, AC coupled Clock Source: Ch1/2 or Ch3/4 Division Ratio: 1/2 (at 9.5 Gbit/s to 14.2 Gbit/s operation bit rate) 1/4 (at 24.3 Gbit/s to 28.2 Gbit/s operation bit rate) Amplitude: 0.3 Vp-p to 0.5 Vp-p Duty: 50 ±10%
Sync Output	Connector: SMA (f) Division Ratio: Pattern Sync, 1/8, 1/16, 1/40 Output Level High Level (V _{OH}): -0.2 V to 0.05 V Low Level (V _{OL}): -1.2 V to -0.7 V
Operation Bit Rates	24.3 Gbit/s to 28.2 Gbit/s 9.5 Gbit/s to 14.2 Gbit/s (with Option 093 installed) (in 1 kbit/s steps)

BERTWave MP2110A Specifications

PPG

Data Output	<p>Number of Channels MP2110A-011: 1 (Data Out, $\overline{\text{Data}}$ Out) MP2110A-012: 2 (Data Out, $\overline{\text{Data}}$ Out) MP2110A-014: 4 (Data Out, $\overline{\text{Data}}$ Out)</p> <p>Connector: K (f) Amplitude Setting Range: 0.1 Vp-p to 0.8 Vp-p, 10 mV steps (single-end) 0.2 Vp-p to 1.6 Vp-p, 20 mV steps (differential output) Accuracy: ± 0.02 V $\pm 20\%$ for settings (at 25.78125 Gbit/s) Data Crossing: 50% $\pm 10\%$ (at 25.78125 Gbit/s, 0.3 Vp-p Amplitude) Tr/Tf (20 to 80%): 15 ps (typ.), 17 ps (max.) (at 25.78125 Gbit/s, 0.3 Vp-p Amplitude) Jitter</p> <table border="1"> <thead> <tr> <th></th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>Jitter (rms)*1</td> <td>600 fs*3 900 fs*4</td> <td>900 fs*3 1200 fs*4</td> </tr> <tr> <td>Intrinsic RJ (rms)*2</td> <td>400 fs*3 800 fs*4</td> <td>600 fs*3 1000 fs*4</td> </tr> </tbody> </table> <p>*1: At 25.78125 Gbit/s, 0.3 Vp-p Amplitude, at 25° $\pm 5^\circ$C test pattern PRBS 2³¹ - 1 *2: At 25.78125 Gbit/s, 0.3 Vp-p Amplitude, at 25° $\pm 5^\circ$C, 1/16 Clock Pattern *3: With MP2110A-014 installed and when measurement channel and same channel clock source selected Example: Ch1/2 selected as clock source and measuring Ch1 *4: With MP2110A-014 installed and when measurement channel and different channel clock source selected Example: When Ch3/4 selected as clock source and measuring Ch1</p> <p>Data Out/$\overline{\text{Data}}$ Out Skew: ± 8 ps: Internal (at 25.78125 Gbit/s, 0.3 Vp-p Amplitude)</p>		Typ.	Max.	Jitter (rms)*1	600 fs*3 900 fs*4	900 fs*3 1200 fs*4	Intrinsic RJ (rms)*2	400 fs*3 800 fs*4	600 fs*3 1000 fs*4
	Typ.	Max.								
Jitter (rms)*1	600 fs*3 900 fs*4	900 fs*3 1200 fs*4								
Intrinsic RJ (rms)*2	400 fs*3 800 fs*4	600 fs*3 1000 fs*4								
Data Format	NRZ									
Test Patterns	PRBS: 2 ⁷ - 1, 2 ⁹ - 1, 2 ¹⁵ - 1, 2 ²³ - 1, 2 ³¹ - 1 Auxiliary Pattern: 1/2 Clock Pattern, 1/16 Clock Pattern									
Functions	Output On/Off, Pattern Inversion, Error addition									

ED

Data Input	<p>Input Number MP2110A-011: 1 (Data, $\overline{\text{Data}}$, Differential Input) MP2110A-012: 2 (Data, $\overline{\text{Data}}$ Out, Differential Input) MP2110A-014: 4 (Data, $\overline{\text{Data}}$ Out, Differential Input)</p> <p>Connector: K (f) Termination: 50Ω, AC coupled * The DC component is terminated to GND via a 50Ω. Data Format: NRZ, Mark Ratio 50%, single-end or differential input Amplitude: 0.05 Vp-p to 0.8 Vp-p Threshold: -0.085 V to +0.085 V, 1 mV steps (single-end input, with external ATT factor of 0 dB) Sensitivity: 25 mVp-p typ. (20° to 30°C) 40 mVp-p max. (25.78125 Gbit/s bit rate, PRBS 2³¹ - 1 test pattern, single-end, Mark Ratio 1/2, loopback connection) Jitter Tolerance: 25.78125 Gbit/s bit rate, PRBS 2³¹ - 1 test pattern, single-end, 50 mV amplitude</p>
Clock Recovery	Built-in
Test Patterns	PRBS: 2 ⁷ - 1, 2 ⁹ - 1, 2 ¹⁵ - 1, 2 ²³ - 1, 2 ³¹ - 1, Inverted Pattern
Measurements	<p>Alarm Detection: Sync Loss (test pattern and asynchronous) Bit Error Rate Detection Error Rate: 0.0001E-18 to 1.0000E-03 Error Count: 0 to 9999999, 1.0000E07 to 9.9999E17 Regenerating Clock Detection: Input signal frequency (sampling method) History: Sync Loss, Bit Error (display reset supported)</p>
Gate Settings	<p>Measurement time: 1 second to 9 days 23 hours 59 minutes 59 seconds Gating cycle: Single/Repeat/Untimed Display update interval: Can display results during measurement (Current)</p>

BERTWave MP2110A Specifications

Sampling Oscilloscope

Sampling Mode	Eye, Pulse, Coherent Eye, Advanced Jitter (Option 096) Sampling Speed 250 ksamples/s (nominal, Sampling Mode Eye, Number of Samples 1350, 25.78125 Gbaud bit rate, 6.4453125 GHz clock rate, 2UI bit count)
NRZ Measurement	Average Power (dBm, μ W)* ¹ , Extinction Ratio* ¹ , OMA (dBm, μ W)* ¹ , OMA at Crossing* ¹ , VECP* ¹ , One Level, Zero Level, Eye Amplitude, Eye Height, Eye Height Ratio, Crossing, SNR, Jitter (p-p, RMS), Rise Time, Fall Time, Eye Width, DCD, RIN OMA, TDEC* ²
Mask Test	Supported Masks: Selected by filter, user created Mask Adjustment: Auto Align, user defined Margin Type: Hit Count, Hit Ratio
NRZ Jitter Analysis (Option 096)	TJ (J ₂ , j ₄ , J ₉ , User Defined BER, Eye Opening), RJ (d-d), RJ (rms)* ³ , DJ (d-d), PJ (p-p)* ³ , PJ Frequency* ³ , DDJ (p-p)* ³ , DDPWS* ³ , DCD* ³ , ISI (p-p)* ³ Graph: TJ/RJ/PJ/DDJ Histogram, DDJ vs. Bit, Bathtub, PJ vs. Frequency
PAM4 Measurement (Option 095)	Average Power (dBm, μ W)* ¹ , TDECQ* ¹ , Partial TDECQ* ¹ , Ceq* ¹ , Outer ExR* ¹ , Outer OMA* ¹ , Linearity, Levels 0/1/2/3, Levels RMS (0/1/2/3), Levels P-P (0/1/2/3), Level Skews (0/1/2/3), Eye Levels (Upper/Middle/Lower), Eye Heights (Upper/Middle/Lower), Eye Widths (Upper/Middle/Lower), Eye Skews (Upper/Middle/Lower), RIN OMA
TDECQ Measurement (Option 095)	TDECQ Equalizer No. of Taps: 3 to 13 Tap Width: 1 UI (T-spaced) Threshold Adjustment (IEEE802.3cd) Target SER can be specified

*1: Optical signals only

*2: No IEEE 12.6 GHz hardware filter

*3: Enabled when Advanced Jitter Mode

Sampling Oscilloscope (Horizontal System)

Trigger Clock Input	Connector: SMA (f) Termination: 50 Ω , AC coupled Frequency: 0.1 GHz to 15.0 GHz Division Ratio: 1 to 99 (but 1, 2, 4, 8, 16, 32, 40, 48, 64 only in Pulse Mode and Coherent Eye Mode) Trigger clock Sensitivity: 100 mVp-p (typ.), 200 mVp-p (max., typ. value using Option 024) *Specified as square-waveform input but also supports sine-wave input above 1 GHz Max. Amplitude: 1.2 Vp-p Absolute Max input: 2 Vp-p RMS Jitter																								
	<table border="1"> <thead> <tr> <th>Option</th> <th colspan="3">1ch, 2ch</th> <th colspan="2">4ch</th> </tr> </thead> <tbody> <tr> <td>Trigger Clock Frequency (GHz)</td> <td>0.1 to 1.25</td> <td>1.25 to 15</td> <td>2.4 to 15*²</td> <td>0.1 to 1.25</td> <td>1.25 to 15</td> </tr> <tr> <td>Typ.</td> <td>1.0 ps</td> <td>400 fs</td> <td>200 fs</td> <td>1.0 ps</td> <td>350 fs</td> </tr> <tr> <td>Max.</td> <td>1.5 ps</td> <td>1.35 ps</td> <td>280 fs</td> <td>1.5 ps</td> <td>600 fs</td> </tr> </tbody> </table>	Option	1ch, 2ch			4ch		Trigger Clock Frequency (GHz)	0.1 to 1.25	1.25 to 15	2.4 to 15* ²	0.1 to 1.25	1.25 to 15	Typ.	1.0 ps	400 fs	200 fs	1.0 ps	350 fs	Max.	1.5 ps	1.35 ps	280 fs	1.5 ps	600 fs
Option	1ch, 2ch			4ch																					
Trigger Clock Frequency (GHz)	0.1 to 1.25	1.25 to 15	2.4 to 15* ²	0.1 to 1.25	1.25 to 15																				
Typ.	1.0 ps	400 fs	200 fs	1.0 ps	350 fs																				
Max.	1.5 ps	1.35 ps	280 fs	1.5 ps	600 fs																				
	*: Option 024 Precision Trigger On																								

Sampling Oscilloscope (Electrical Channel)

Data Input	Connector: K (f) Termination: 50 Ω , DC coupled Absolute Max. Rating: \pm 2 V Dynamic Range: \pm 400 mV (Relative value of amplitude offset), Recommended input amplitude \leq 400 mVp-p
Amplitude Setting	Scale: 1 mV/Div to 200 mV/Div, 1 mV steps Offset: -500 mV to +500 mV, 1 mV steps
Amplitude Accuracy	\pm amplitude accuracy \pm 2% for read value (Calculation example: At 400 mV amplitude read value and 50 mV offset voltage) The following figure shows the amplitude accuracy after calibration.
3-dB Bandwidth	40 GHz (typ.)
Flatness	\pm 1 dB (10 MHz to 30 GHz, typ.)
RMS Noise	1.5 mV (typ.) 2.5 mV (max.)

BERTWave MP2110A Specifications

Sampling Oscilloscope (Optical Channel)

Connector	FC Connector (changeable)				
Wavelength, Fiber Coupling	Input	Option	Wavelength		
	SMF	1 ch, 2ch	860 nm to 1650 nm		
		4 ch	1260 nm to 1650 nm		
MMF	1ch, 2ch, 4ch	800 nm to 860 nm			
Bandwidth (No Filter)	SMF: 35 GHz (typ.) MMF: 25 GHz (typ.)				
Filters	NRZ		PAM4 (Option 095)*		
	100 GbE/4 (25.78125 Gbit/s) 100 GbE/4 FEC (27.7393 Gbit/s) OTU4 (27.952493 Gbit/s) 32GFC (28.05 Gbit/s)		50 GbE/100 GbE/200 GbE/400 GbE: 26.5625 Gbaud MM TDECQ (11.2 GHz) 26.5625 Gbaud (12.6 GHz) IEEE802.3cd draft2.0 26.5625 Gbaud SM TDECQ (13.3 GHz) 26.5625 Gbaud (19.3 GHz) 53.1250 Gbaud SM TDECQ (26.6 GHz) 53.1250 Gbaud (38.7 GHz) 64GFC: 28.9000 Gbaud MM TDECQ (12.4 GHz) 28.9000 Gbaud SM TDECQ (14.45 GHz) *: Supports operation when Coherent Eye Mode and Test Pattern setting is not Variable. Uses filter response correction by digital signal processing (software) to secure reference filter band.		
Optical Noise	Input	Option	Optical Noise*		
		OTU4 Filter	03x (excluding 030) Typ. 3.4 μ Wrms, Max. 4.3 μ Wrms (Typ. 4.8 μ Wrms, Max. 6.1 μ Wrms) 04x (excluding 040) Typ. 4.1 μ Wrms, Max. 5.2 μ Wrms (Typ. 5.8 μ Wrms, Max. 7.4 μ Wrms) 030 Typ. 4.8 μ Wrms, Max. 6.1 μ Wrms (Typ. 6.8 μ Wrms, Max. 8.6 μ Wrms) 040 Typ. 5.8 μ Wrms, Max. 7.3 μ Wrms (Typ. 8.2 μ Wrms, Max. 10.4 μ Wrms)		
	SMF 1310 nm	No Filter	03x (excluding 030) Typ. 5.4 μ Wrms, Max. 7.5 μ Wrms (Typ. 7.6 μ Wrms, Max. 10.6 μ Wrms) 04x (excluding 040) Typ. 5.5 μ Wrms, Max. 7.5 μ Wrms (Typ. 7.8 μ Wrms, Max. 10.6 μ Wrms) 030 Typ. 7.6 μ Wrms, Max. 10.6 μ Wrms (Typ. 10.8 μ Wrms, Max. 15.0 μ Wrms) 040 Typ. 7.8 μ Wrms, Max. 10.6 μ Wrms (Typ. 11.0 μ Wrms, Max. 15.0 μ Wrms)		
			MMF 850 nm	No Filter	03x Typ. 6.7 μ Wrms, Max. 8.4 μ Wrms (Typ. 9.5 μ Wrms, Max. 11.9 μ Wrms) 04x Typ. 7.0 μ Wrms, Max. 8.9 μ Wrms (Typ. 9.9 μ Wrms, Max. 12.6 μ Wrms) 03x Typ. 8.1 μ Wrms, Max. 10.5 μ Wrms (Typ. 11.4 μ Wrms, Max. 14.9 μ Wrms) 04x Typ. 8.6 μ Wrms, Max. 11.1 μ Wrms (Typ. 12.1 μ Wrms, Max. 15.7 μ Wrms)
					OTU4 Filter
	*: Numeric values in parenthesis are values for channel B when the Option 054 Clock Recovery Unit is installed.				
	Mask Sensitivity (Estimated optical power when Mask Margin (Hit Count 0) reaches 0% (calculated from optical noise))	Input	Option	Mask Sensitivity (typ)*	
			SMF (1310 nm OTU4 Filter)	03x (excluding 030) -15 dBm (-13.5 dBm) 04x (excluding 040) -14 dBm (-12.5 dBm) 030 -13.5 dBm (-12 dBm) 040 -12 dBm (-10.5 dBm)	
		MMF (850 nm OTU4 Filter)		-12 dBm (-10.5 dBm)	
		*: Numeric values in parenthesis are values for channel B when the Option 054 Clock Recovery Unit is installed.			
Amplitude Setting		Scale: 1 μ W/Div to 200 μ W/Div, 1 μ W steps Offset: -500 μ W/Div to 500 μ W/Div, 1 μ W steps			
Max. Input Power (Non-Saturated Range)	Input	Option	Typical Maximum Input Power (Before Distortion)		
		SMF	1 ch, 2ch -2 dBm (at 1310 nm, ExR 8 dB signal input) 4 ch +2 dBm (at 1310 nm, ExR 4 dB signal input)		
	MMF	1ch, 2ch, 4ch +2 dBm (at 850 nm, ExR 3 dB signal input)			
Absolute Max. Rating (Damage-free Range)			SMF		
	Average Value		+5 dBm		
	Peak		+8 dBm		
MMF	Average Value		+7 dBm		
MMF	Peak		+10 dBm		
Optical Return Loss	SMF: -27 dB (typ., at 1310 nm SMF connection) MMF: -20 dB (typ., at 850 nm MMF connection)				
Optical Parameters Accuracy (typ.)	Input Level	-18 to -12 dBm	-12 to 0 dBm	0 to +2 dBm*	
	Accuracy (typ.)	\pm 0.6 dB	\pm 0.35 dB	\pm 0.55 dB	
	*: This specified value does not apply to SMF input at the 1ch and 2ch configurations.				
O/E Monitor Out (Only with Option 054 installed)	Connector: K (f) Conversion Gain: 60 V/W (SMF input, typ.), 33 V/W (MMF input, typ.)				

1ch: 033/043/035/045/036/046
2ch: 032/042
4ch: 030/040/039/049
03x: 030/032/033/035/036/039
04x: 040/042/043/045/046/049

BERTWave MP2110A Specifications

Clock Recovery (Electrical/Optical) (Option 054)

CRU Input	<p>Connector: K (f), 50Ω, AC coupled ✱ The DC component is terminated to GND via a 50Ω. Data Format: NRZ, PAM4 Bit Rate: 25.5 Gbaud to 28.2 Gbaud Input Sensitivity: 10 mVp-p (typ.)^{*1, *2}, 20 mVp-p (max.)^{*2} Max. Amplitude: 800 mVp-p Absolute Maximum Input: 1 Vp-p Withstand Contiguous 0 s: 500 bits min. at PRBS 2¹⁵ – 1 Zero Substitution Pattern</p>
CRU Output	<p>Connector: SMA (f), 50Ω, AC coupled In Recovery Mode Amplitude: 480 mVp-p (typ.) Clock frequency: 12.75 GHz to 14.1 GHz (half-rate Clock) Additive Jitter: 250 fs rms (typ.)^{*1, *3}, 400 fs rms (max.)^{*3} Loop Bandwidth: 4 MHz, 10 MHz, bit rate/1667 selected, -20 dB/dec attenuation In Through Mode Amplitude: 500 mVp-p (typ.) Operation Frequency: 0.1 GHz to 1.7625 GHz (1.7625 GHz requires 28.2 GHz 1/16 Clock) Additive Jitter: 200 fs rms (typ.)^{*1, *4}, 400 fs rms (max.)^{*4}</p>

✱1: 25 ±5°C

✱2: NRZ, at 25.78125 Gbit/s, PRBS 2³¹ – 1, 10-MHz Loop Bandwidth, using MP2110A PPG

✱3: NRZ, at 25.78125/26.5625/28.05 Gbit/s, 400 ±100 mVp-p, 1/4 Clock Pattern, 10-MHz Loop Bandwidth, using MP2110A PPG

✱4: NRZ, at 25.78125/26.5625/28.05 Gbit/s, 400 mVp-p, 1/16 Clock Pattern, using MP2110A PPG


BERTWave MP2110A Selection Guide

Either a BERT or a sampling oscilloscope, or both a BERT and a sampling oscilloscope can be selected for the MP2110A. Select by referring to the following table and block diagram.

		Function	Selection/Option Addition
BERT	Select any one	1ch	MP2110A-011
		2ch	MP2110A-012
		4ch	MP2110A-014
	Select as addition	PPG/ED Bit Rate Extension Adds bit rates of 9.5 Gbit/s to 14.2 Gbit/s to standard range of 24.3 Gbit/s to 28.2 Gbit/s.	MP2110A-093
Sampling Oscilloscope	Select any one	Electrical 2ch	MP2110A-021
		Electrical 1ch + Optical 1ch	MP2110A-033 or 043*1
		Optical 1ch	MP2110A-035 or 045*1
		Optical 2ch	MP2110A-036 or 046*1
		Optical 4ch	MP2110A-032 or 042*1
	Select as addition	Precision Trigger Supports high-accuracy jitter measurement	MP2110A-024*2
		Clock Recovery (Electrical/Optical) Recovers Clock from input data signal	MP2110A-054
		PAM4 Analysis Software Supports PAM4 signal analysis	MP2110A-095
		Jitter Analysis Software Supports NRZ signal jitter analysis	MP2110A-096

*1: Option 04x and Option 03x have different optical channel reference receiver characteristics (Bessel filter approximation characteristics).
*2: Option 024 cannot be added with the 4ch configuration (Option 030/039/040/049).

Block Diagram

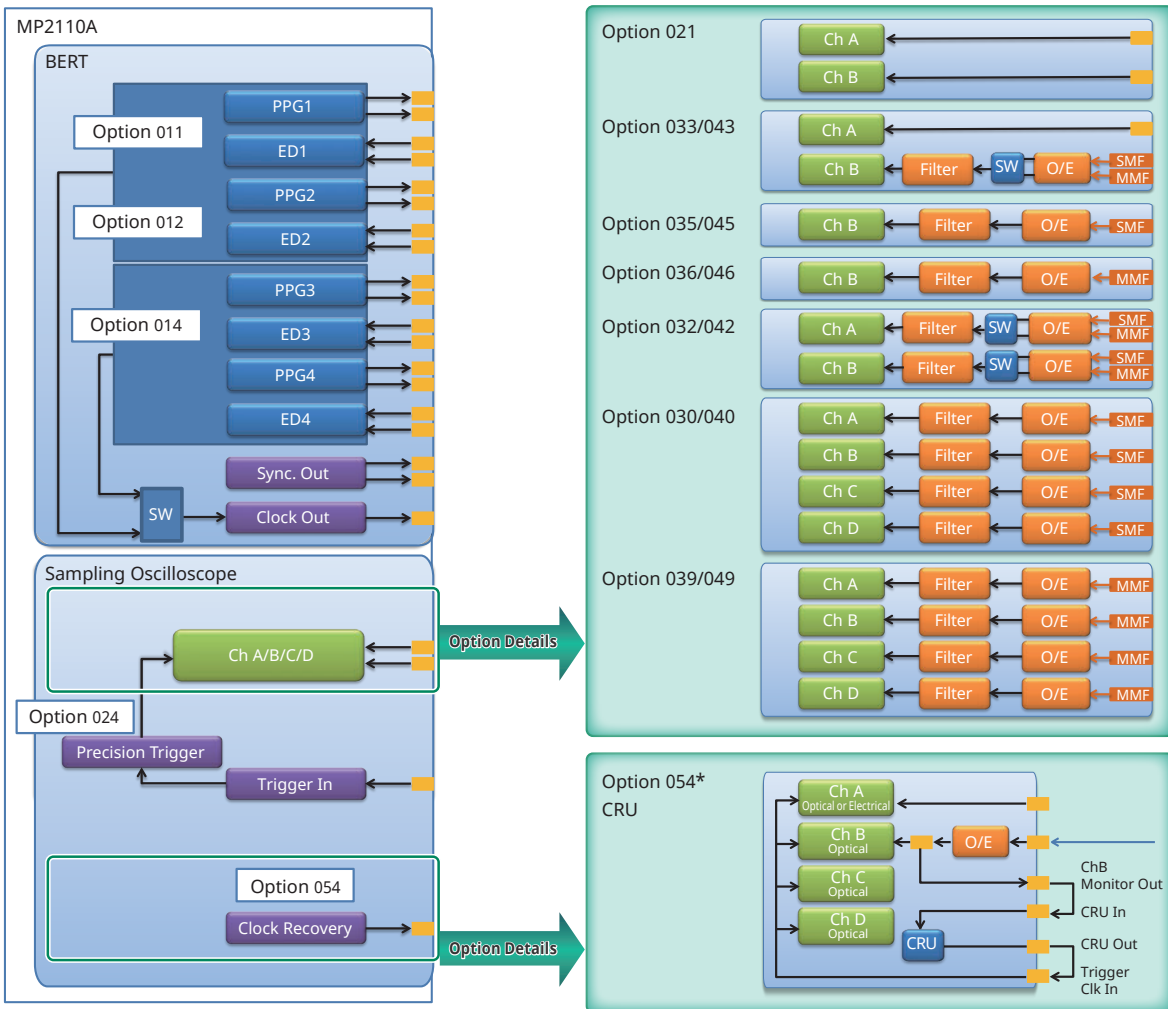

* Optical channel: The clock in the optical signal input to Ch B is recovered. Use the accessory U-link coaxial cable to make the connection.
Electrical channel: Split the signal using the Pick-off tee and input to CRU In. There is no Monitor Out connector when Ch B is an electrical channel.

BERTWave MP2110A Ordering Information

When making a contract, determine the configuration by referencing the selection guide and specify the type, model, name, and quantity. The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
MP2110A	-Main Frame- BERTWave
J1627A	-Standard Accessories- Power Cord GND Connection Cable: 1 MX210000A BERTWave Control Software CD-ROM: 1
MP2110A-011 MP2110A-012 MP2110A-014	-Options- 1ch BERT 2ch BERT 4ch BERT
MP2110A-021	Dual Electrical Scope
MP2110A-024	Precision Trigger
MP2110A-030	Quad Optical Scope for Singlemode Baseband Flat
MP2110A-032	Dual Optical Scope Baseband Flat
MP2110A-033	Optical and Single-ended Electrical Scope Baseband Flat
MP2110A-035	Optical Scope for Singlemode Baseband Flat
MP2110A-036	Optical Scope for Multimode Baseband Flat
MP2110A-039	Quad Optical Scope for Multimode Baseband Flat
MP2110A-040	Quad Optical Scope for Singlemode
MP2110A-042	Dual Optical Scope
MP2110A-043	Optical and Single-ended Electrical Scope
MP2110A-045	Optical Scope for Singlemode
MP2110A-046	Optical Scope for Multimode
MP2110A-049	Quad Optical Scope for Multimode
MP2110A-054	Clock Recovery (Electrical/Optical)
MP2110A-093	PPG/ED Bit Rate Extension
MP2110A-095	PAM4 Analysis Software
MP2110A-096	Jitter Analysis Software
MP2110A-111 MP2110A-112 MP2110A-114	-Retrofit Options*1, *2- 1ch BERT Retrofit 2ch BERT Retrofit 4ch BERT Retrofit
MP2110A-121	Dual Electrical Scope Retrofit
MP2110A-124	Precision Trigger Retrofit
MP2110A-130	Quad Optical Scope for Singlemode Baseband Flat Retrofit
MP2110A-132	Dual Optical Scope Baseband Flat Retrofit
MP2110A-133	Optical and Single-ended Electrical Scope Baseband Flat Retrofit
MP2110A-135	Optical Scope for Singlemode Baseband Flat Retrofit
MP2110A-136	Optical Scope for Multimode Baseband Flat Retrofit
MP2110A-139	Quad Optical Scope for Multimode Baseband Flat Retrofit
MP2110A-140	Quad Optical Scope for Singlemode Retrofit
MP2110A-142	Dual Optical Scope Retrofit
MP2110A-143	Optical and Single-ended Electrical Scope Retrofit
MP2110A-145	Optical Scope for Singlemode Retrofit
MP2110A-146	Optical Scope for Multimode Retrofit
MP2110A-149	Quad Optical Scope for Multimode Retrofit
MP2110A-154	Clock Recovery (Electrical/Optical) Retrofit
MP2110A-193	PPG/ED Bit Rate Extension Retrofit
MP2110A-195	PAM4 Analysis Software Retrofit*3
MP2110A-395	PAM4 Analysis Software Retrofit*3
MP2110A-196	Jitter Analysis Software Retrofit
MP2110A-396	Jitter Analysis Software Retrofit
J1632A J1341A	-Standard Accessories MP2110A-011- Terminator: 3 Open: 5
J1632A J1341A	-Standard Accessories MP2110A-012- Terminator: 5 Open: 7
J1632A J1341A	-Standard Accessories MP2110A-014- Terminator: 9 Open: 11
J1341A	-Standard Accessories MP2110A-021- Open: 3
J0617B Z0397A J1341A	-Standard Accessories MP2110A-030/039/040/049- Replaceable Optical Connector (FC-PC): 4 FC ADAPTER CAP: 4 Open: 1
J0617B Z0397A J1341A	-Standard Accessories MP2110A-032/042- Replaceable Optical Connector (FC-PC): 4 FC ADAPTER CAP: 4 Open: 1

Model/Order No.	Name
J0617B Z0397A J1341A	-Standard Accessories MP2110A-033/043- Replaceable Optical Connector (FC-PC): 2 FC ADAPTER CAP: 2 Open: 2
J0617B Z0397A J1341A	-Standard Accessories MP2110A-035/045- Replaceable Optical Connector (FC-PC): 1 FC ADAPTER CAP: 1 Open: 1
J0617B Z0397A J1341A	-Standard Accessories MP2110A-036/046- Replaceable Optical Connector (FC-PC): 1 FC ADAPTER CAP: 1 Open: 1
J1632A J1341A J1763A J1764A	-Standard Accessories MP2110A-054- Terminator: 1 Open: 2 U Link Coaxial Cable (K): 1 U Link Coaxial Cable (SMA): 1
MP2110A-ES310 MP2110A-ES510	-Maintenance Service- 3 Years Extended Warranty Service 5 Years Extended Warranty Service
J1341A J1632A J1359A J1349A J1342A J1343A J1439A J1551A J1763A J1764A J1510A Z0397A J0617B J0618D J0618E J0619B J0635A J1139A J1344A J1345A J0660A J0893A J1347A J1346A J1348A J0839A J1519A J1681A J1682A G0364A G0366A Z0914A Z0915A G0342A Z0306A Z0541A Z1952A Z1944A B0734A B0735A W3831AE W3773AE	-Optional Accessories- Open (Coaxial connector cover) Terminator Coaxial Adaptor (K-P · K-J, SMA compatible) Coaxial Cable (0.3 m, SMA connector) Coaxial Cable (0.8 m, SMA connector) Coaxial Cable (1 m, SMA connector) Coaxial Cable (0.8 m, K connector) Coaxial Skew Match Cable (0.8 m, K connector) U Link Coaxial Cable (K connector) U Link Coaxial Cable (SMA connector) Pick OFF Tee FC ADAPTER CAP Replaceable Optical Connector (FC-PC) Replaceable Optical Connector (ST) Replaceable Optical Connector (DIN) Replaceable Optical Connector (SC) FC/PC-FC/PC-1M-SM FC/PC-LC/PC-1M-SM LC/PC-LC/PC-1M-SM SC/PC-LC/PC-1M-SM SC/PC-SC/PC-1M-SM FC/PC-FC/PC-1M-GI (50/125) FC/PC-LC/PC-1M-GI (62.5/125) LC/PC-LC/PC-1M-GI (62.5/125) SC/PC-LC/PC-1M-GI (62.5/125) SC/PC-SC/PC-1M-GI (50/125) Optical Fiber Cord (MM, 12FIBER, MPO,3 m) MPO Loopback Cable MPO to FC convert cable 100G LR4 1310 nm QSFP28 100G SR4 850 nm QSFP28 Ferrule Cleaner Replacement Reel for Ferrule Cleaner ESD DISCHARGER Wrist Strap USB Mouse HDMI to VGA Adapter LCD Monitor Carrying Case Rack Mount Kit MP2110A BERTWave Operation Manual BERTWave Series Remote Control Operation Manual

- *1: BERT retrofit supported when BERT not installed or to increase number of channels
- *2: Oscilloscope retrofit supported when oscilloscope not installed or when changing Option 03x and 04x, same channel configuration.
- *3: About PAM4 Analysis Software Retrofit is sometimes, depending on the serial number, the customer can perform the retrofit, but sometimes return to the factory may be necessary. Contact your sales representative for more details.


BERTWave MP2110A Related Products

BERTWave MP2100B

For R&D and Manufacturing of 10G and 40G Multi-channel Optical Modules

- All-in-one BER and Eye-pattern analysis
- Built-in 1ch to 4 ch 12.5 Gbit/s BERT
- High-speed mask tests
- Jitter 1 ps high-quality PPG and 10 mVp-p high-sensitivity ED

The all-in-one MP2100B has a built-in BER tester and sampling oscilloscope for running simultaneous BER tests and eye pattern analyses required for developing and manufacturing modules. The number of BERT channels can be expanded to four, all supporting simultaneous BER measurements. Additionally, the high sampling speed reduces the eye pattern measurement time. Multi-channel optical modules, such as QSFP+, can be measured more efficiently using the MP2100B.




Optical Spectrum Analyzer MS9740B

600 nm to 1750 nm

Faster measurement speed shortens measurement time and improves production efficiency

- Faster measurement speed of <math><0.2 \text{ s/5 nm}</math> reduces total analysis time for active optical devices
- Built-in applications for evaluating active optical devices
- Built-in Fast mode cuts measurement time by 50% for better production efficiency to predecessor MS9740A using 200 Hz or 1 kHz bandwidth
- Excellent cost performance
- >58 dB dynamic range (0.4 nm from peak wavelength)
- 30 pm minimum resolution
- Low power consumption (75 VA), light weight (15 kg max.)

The MS9740B reduces production costs by shortening active optical device evaluation times and supporting efficient analysis applications.

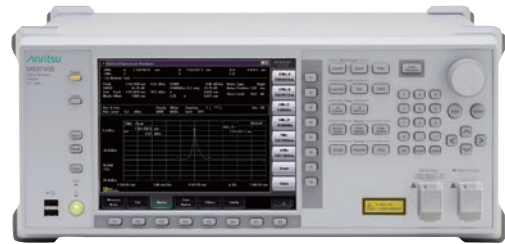

Optical Attenuator G035xF/S

This bench-top optical attenuator has an optical attenuation of 60 dB. Support for remote control over GPIB makes it easy to configure a remote measurement setup in combination with the the BERTWave series.

Choose the model with the correct fiber connectors for the application.



Optical Switch G034xF/S

This bench-top optical switch supports 1x4, 2x4, and 1x16 switching. Support for remote control over GPIB makes it easy to configure a remote measurement setup in combination with the the BERTWave series.

Choose the model with the correct fiber connectors for the application.



Model/Order No.	Name
G0350F*	Programmable Optical Attenuator (SM9, FC/UPC)
G0350S*	Programmable Optical Attenuator (SM9, SC/UPC)
G0351F*	Programmable Optical Attenuator (SM9, FC/UPC, Power Monitor)
G0351S*	Programmable Optical Attenuator (SM9, SC/UPC, Power Monitor)
G0352F*	Programmable Optical Attenuator (GI50, FC/UPC)
G0352S*	Programmable Optical Attenuator (GI50, SC/UPC)
G0353F*	Programmable Optical Attenuator (GI50, FC/UPC, Power Monitor)
G0353S*	Programmable Optical Attenuator (GI50, SC/UPC, Power Monitor)
G0354F*	Programmable Optical Attenuator (GI62.5, FC/UPC)
G0354S*	Programmable Optical Attenuator (GI62.5, SC/UPC)
G0355F*	Programmable Optical Attenuator (GI62.5, FC/UPC, Power Monitor)
G0355S*	Programmable Optical Attenuator (GI62.5, SC/UPC, Power Monitor)

*: KC Mark not support

Model/Order No.	Name
G0344F*	Optical Switch (1x4, SM9, FC/UPC)
G0344S*	Optical Switch (1x4, SM9, SC/UPC)
G0345F*	Optical Switch (1x16, SM9, FC/UPC)
G0345S*	Optical Switch (1x16, SM9, SC/UPC)
G0346F*	Optical Switch (1x4, GI50, FC/UPC)
G0346S*	Optical Switch (1x4, GI50, SC/UPC)
G0347F*	Optical Switch (1x4, GI62.5, FC/UPC)
G0347S*	Optical Switch (1x4, GI62.5, SC/UPC)
G0348F*	Optical Switch (2x4, GI50, FC/UPC)
G0348S*	Optical Switch (2x4, GI50, SC/UPC)
G0349F*	Optical Switch (2x4, GI62.5, FC/UPC)
G0349S*	Optical Switch (2x4, GI62.5, SC/UPC)

*: KC Mark not support

• United States

Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen,
TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Bldv Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1-Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• Sweden

Anritsu AB

Isafjordsgatan 32C, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Torveporten 2, 2500 Valby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

902, Aurora Tower,
P O Box: 500311 - Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited

6th Floor, Indigube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817