

**Anritsu** envision : ensure

# Cell Master™

## Compact Handheld Base Station Analyzer

### MT8213E

2 MHz to 6 GHz  
9 kHz to 6 GHz  
10 MHz to 6 GHz

Cable & Antenna Analyzer  
Spectrum Analyzer  
Power Meter



## Introduction

Anritsu introduces its latest generation compact handheld Base Station Analyzer for installation and maintenance of wireless networks. Designed as a lightweight base station analyzer meeting virtually all the testing needs of an RF technician, the Cell Master features Signal Analyzer options for 2G, 3G, and 4G cellular networks including LTE, WiMAX, and digital broadcast.

---

## Cable and Antenna Analyzer Highlights

- Measurements: RL, VSWR, Cable Loss, DTF, Phase
- 2-port Transmission Measurement: High/Low Power
- Sweep Speed: 1 ms/data point, typical
- Display: Single or Dual Measurement Touchscreen
- Calibration: OSL, InstaCal™, and FlexCal™
- Bias Tee: 32 V internal

---

## Spectrum and Interference Analyzer Highlights

- Measurements: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Interference Mapping
- Dynamic Range: > 102 dB in 1 Hz RBW
- DANL: -162 dBm in 1 Hz RBW
- Phase Noise: -100 dBc/Hz max @ 10 kHz offset at 1 GHz
- Frequency Accuracy: ± 50 ppb with GPS On

---

## Capabilities and Functional Highlights

- CPRI LTE RF measurements
- OBSAI LTE RF measurements
- LTE/LTE-A FDD/TDD; MIMO (2x2, 4x4)
- NB-IoT measurements
- GSM/EDGE
- W-CDMA/HSPA+
- TD-SCDMA/HSPA+
- CDMA, EV-DO
- Fixed, Mobile WiMAX
- EMF Test
- USB Power Sensors up to 50 GHz
- Coverage Mapping
- 3 hour battery operation time
- USB or Ethernet data transfer
- PIM Alert Application
- ISDB-T, ISDB-T SFN
- DVB-T/H, DVB-T/H SFN
- Interference Analyzer
- GPS information on stored traces
- Built-in Bias Tee
- Internal Power Meter
- High Accuracy Power Meter
- Master Software Tools™
- Line Sweep Tools™
- easyTest Tools™
- Web Remote Control with Ethernet

Table of Contents

Definitions . . . . . 3

Cable and Antenna Analyzer . . . . . 4

2-Port Transmission Measurement (Option 21) . . . . . 5

Bias-Tee (Option 10) . . . . . 5

Spectrum Analyzer . . . . . 6

Coverage Mapping (Option 431) . . . . . 8

Electromagnetic Field Test (Option 444) . . . . . 8

Ethernet Connectivity (formerly Option 413) . . . . . 8

Interference Analyzer (Option 25) . . . . . 9

GPS Receiver (Option 31) . . . . . 9

Channel Scanner (Option 27) . . . . . 9

CW Signal Generator (Option 28) . . . . . 9

Gated Sweep (Option 90) . . . . . 9

Power Meter . . . . . 10

High Accuracy Power Meter (Option 19) . . . . . 10

RF over Fiber Hardware (Option 759) . . . . . 10

CPRI LTE RF Signal Analyzer (Option 752) . . . . . 11

OBSAI LTE RF Signal Analyzer (Option 753) . . . . . 13

LTE/LTE-A Signal Analyzers (Options 883 and 886) . . . . . 14

NB-IoT Analyzer (Option 887) . . . . . 15

GSM/EDGE Signal Analyzer (Option 880) . . . . . 16

W-CDMA/HSPA+ Signal Analyzer (Option 881) . . . . . 17

CDMA Signal Analyzer (Option 884) . . . . . 18

EV-DO Signal Analyzer (Option 884) . . . . . 19

Fixed WiMAX Signal Analyzer (Option 885) . . . . . 20

Mobile WiMAX Signal Analyzer (Option 885) . . . . . 21

TD-SCDMA/HSPA+ Signal Analyzer (Option 882) . . . . . 22

ISDB-T Signal Analyzer (Options 30, 79, 32) . . . . . 23

DVB-T/H Signal Analyzer (Options 64, 57, 78) . . . . . 24

General Specifications . . . . . 25

Line Sweep Tools . . . . . 26

easyTest Tools™ . . . . . 26

easyMap Tools™ . . . . . 26

Master Software Tools . . . . . 27

Web Remote Control . . . . . 28

Programmable Remote Control . . . . . 28

Ordering Information – Options . . . . . 29

Standard Accessories . . . . . 30

Manuals . . . . . 30

Troubleshooting Guides . . . . . 30

Power Sensors . . . . . 30

Optional Accessories . . . . . 31

Definitions

Specifications	All specifications and characteristics apply to Revision 2 <sup>1</sup> instruments under the following conditions, unless otherwise stated: <ul style="list-style-type: none"> <li>• After 5 minutes of warm-up time, where the instrument is left in the ON state</li> <li>• Sweep Mode set to Performance</li> <li>• When using the internal reference signal</li> </ul>
Typical Specifications	Typical specifications are not tested and not warranted. They are generally representative of characteristic performance.
Nominal	Design parameters are not tested and not warranted.
Calibration Cycle	Recommended calibration cycle is 12 months.
Time Base Error	Input Frequency × Frequency Reference Error

All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: [www.anritsu.com](http://www.anritsu.com)

1. Applies to instruments with serial number ≥ 1609XXX.



## Cable and Antenna Analyzer

### Measurements

Measurements	VSWR Return Loss Cable Loss Distance-to-Fault (DTF) Return Loss Distance-to-Fault (DTF) VSWR 1-Port Phase Smith Chart (50/75 Ω selectable)
--------------	--

### Setup Parameters

Measurement Display	Single/Dual Measurement Display with independent markers
Frequency	Start/Stop, Signal Standard, Start Cal
DTF	Start/Stop, DTF Aid, Units (m/ft), Cable Loss, Propagation Velocity, Cable, Windowing
Windowing	Rectangular, Normal Side Lobe, Low Side Lobe, Minimum Side Lobe
Amplitude	Top, Bottom Auto Scale, Full Scale
Sweep	Run/Hold, Single/Continuous, RF Immunity (High/Low), Data Points, Averaging/Smoothing, Output Power (High/Low), RF Pwr When Hold (On/Off)
Data Points	137, 275, 551, 1102, 2204
Markers	Markers 1-6 (On/Off), Delta Makers 1-6 (On/Off), Marker to Peak/Valley, Peak/Valley Auto, Marker Table (On/Off), All Markers Off
Traces	Recall, Copy to Display Memory, No Trace Math, Trace ± Memory, Trace Overlay (On/Off)
Limit Line	On/Off, Single Limit, Multi-segment Edit, Limit Alarm (On/Off), Pass Fail Message (On/Off), Pass/Fail (Unbounded/Bounded), Warning Limit Offset, Clear Limit
Calibration	Start Cal, Cal Type (Standard/FlexCal™), Disp Valid Cal Temp Range
Save/Recall	Setups, Measurements, Screen Shots (.jpg) (save only)

### Frequency

Frequency Range	2 MHz to 6 GHz
Frequency Accuracy	≤ ± 2.5 ppm @ 25 °C
Frequency Resolution	1 kHz (RF immunity low), 100 kHz (RF immunity high)

### Output Power

High	0 dBm, typical
Low	2 MHz to 1.5 GHz: -40 dBm, typical >1.5 GHz to 6 GHz: -30 dBm, typical

### Interference Immunity

On-Channel	+17 dBm @ > 1.0 MHz from carrier frequency
On-Frequency	0 dBm within ± 10 kHz of the carrier frequency

### Measurement Speed

Return Loss	≤ 1.00 ms/data point, RF immunity low, typical
Distance-to-Fault	≤ 1.25 ms/data point, RF immunity low, typical

### Return Loss

Measurement Range	0 dB to 60 dB
Resolution	0.01 dB

### VSWR

Measurement Range	1:1 to 65:1
Resolution	0.01

### Cable Loss

Measurement Range	0 dB to 30 dB
Resolution	0.01 dB

### Distance-to-Fault

Vertical Range Return Loss	0 dB to 60 dB
Vertical Range VSWR	1:1 to 65:1
Fault Resolution (meters)	$(1.5 \times 10^8 \times v_p) / \Delta F$ ( $v_p$ = velocity propagation constant, $\Delta F$ is $F_2 - F_1$ in Hz)
Horizontal Range (meters)	0 to $(\text{Data Points} - 1) \times \text{Fault Resolution}$ , to a maximum of 1500 m (4921 ft)

### 1-Port Phase

Measurement Range	-180° to +180°
Resolution	0.01°



### Smith Chart

Resolution	0.01 50/75 ohm selectable
------------	---------------------------

**Cable and Antenna Analyzer** (continued)

**Measurement Accuracy** Corrected  
 Directivity > 42 dB, OSL Calibration  
 > 38 dB, InstaCal™ Calibration

**Measurement Uncertainty**

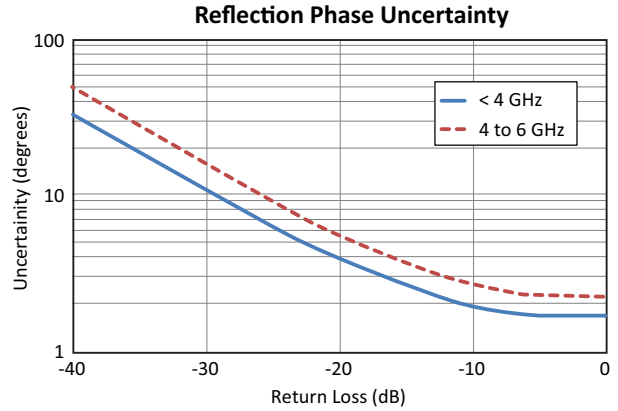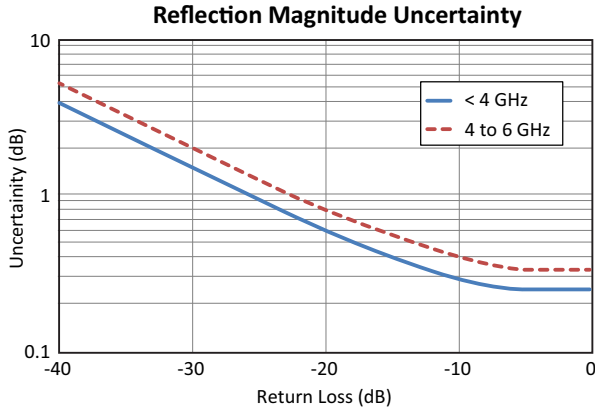

**2-Port Transmission Measurement (Option 21)**

**Frequency**

Frequency Range 2 MHz to 6 GHz  
 Frequency Resolution 10 Hz

**Output Power**

High 0 dBm, typical  
 Low 2 MHz to 1.5 GHz: -40 dBm, typical  
 > 1.5 GHz to 4/6 GHz: -30 dBm, typical

**High Dynamic Range (On)**

2 MHz to 4 GHz 80 dB, 95 dB, typical  
 4 GHz to 6 GHz 70 dB, 85 dB, typical  
 Application Options Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

**Bias-Tee (Option 10)**

Setup On/Off, Voltage, Current (Low/High)  
 Voltage Range +12 V to +32 V  
 Current (Low/High) 250 mA/450 mA, 1 A surge for 100 ms  
 Resolution 0.1 V

 **Spectrum Analyzer**

**Measurements**

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m <sup>2</sup> , dBmV/m, dBV/m, dBμV/m, Volt/m, Watt/m <sup>2</sup> , dBW/m <sup>2</sup> , A/m, dBA/m and Watt/cm <sup>2</sup> ) Occupied Bandwidth (measures 99 % to 1 % power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, USB and LSB), (audio out only) C/I (carrier-to-interference ratio) Emission Mask Coverage Mapping (requires Option 431) PIM Alert Application (available for download)
--------------------	--

**Setup Parameters**

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Save-on-Event, Recall, Copy, Delete
Save	Setups, Measurements, Screen Shots (JPEG), Limit Lines, Spurious Emission Mask
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Recall	Setups, Measurements, Limit Lines, Spurious Emission Mask
Copy	Selected file or files to internal/external memory (USB)
Delete	Selected file or files from internal/external memory (USB)
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

**Sweep Functions**

Sweep	Single/Continuous, Sweep Mode (Fast, Performance, No FFT), Reset, Detection, Minimum Sweep Time, Trigger Type, Gated Sweep (see Option 90)
Detection	Peak, RMS, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Change Position, Manual

**Trace Functions**

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ↔ C, Max Hold, Min Hold
Trace C Operations	A → C, B ↔ C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale

**Marker Functions**

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency amplitude and offset

**Limit Line Functions**

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Points (41 max), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

**Frequency**

Frequency Range	9 kHz to 6 GHz
Tuning Resolution	1 Hz
Frequency Reference	Aging: ± 1.0 ppm/year Accuracy: ± 1.5 ppm (25 °C ± 25 °C) + aging, < ± 50 ppb with GPS On
Frequency Span	10 Hz to 6 GHz including zero span
Sweep Time	Minimum 100 ms, 7 μs to 3600 s in zero span
Sweep Time Accuracy	± 2 % in zero span

**Bandwidth**

Resolution Bandwidth (RBW)	1 Hz to 3 MHz in 1-3 sequence ± 10% (1 MHz max in zero-span) (-3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 kHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1



**Spectrum Analyzer** (continued)

**Spectral Purity**

SSB Phase Noise @ 1 GHz     -100 dBc/Hz, -110 dBc/Hz typical @ 10 kHz offset  
 -105 dBc/Hz, -112 dBc/Hz typical @ 100 kHz offset  
 -115 dBc/Hz, -121 dBc/Hz typical @ 1 MHz offset

**Amplitude Ranges**

Dynamic Range     > 102 dB (2.4 GHz), 2/3 (TOI-DANL) in 1 Hz RBW  
 Measurement Range     DANL to +26 dBm ( $\geq$  50 MHz)  
                                  DANL to 0 dBm (< 50 MHz)  
 Display Range     1 dB to 15 dB/div in 1 dB steps, ten divisions displayed  
 Reference Level Range     -150 dBm to +30 dBm  
 Maximum Continuous Input Power     +30 dBm  
 Attenuator Range     0 dB to 55 dB in 5 dB steps  
 Amplitude Units     Log Scale Modes: dBW, dBm, dB $\mu$ W, dBV, dBmV, dB $\mu$ V, dBA, dBmA, dB $\mu$ A  
                                  Linear Scale Modes: nV,  $\mu$ V, mV, V, kV, nW,  $\mu$ W, mW, W, kW, nA,  $\mu$ A, mA, A

**Amplitude Accuracy**

9 kHz to 100 kHz      $\pm$  2.00 dB typical (Preamp Off)  
 100 kHz to 4.0 GHz      $\pm$  1.25 dB,  $\pm$  0.5 dB typical  
 > 4.0 GHz to 6 GHz      $\pm$  1.50 dB,  $\pm$  0.5 dB typical

**Displayed Average Noise Level (DANL)**

(RBW = 1 Hz, 0 dB attenuation)	Preamp Off (Reference Level -20 dBm)		Preamp On (Reference Level -50 dBm)	
	Maximum	Typical	Maximum	Typical
10 MHz to 2.4 GHz	-141 dBm	-146 dBm	-157 dBm	-162 dBm
> 2.4 GHz to 4 GHz	-137 dBm	-141 dBm	-154 dBm	-159 dBm
> 4 GHz to 5 GHz	-134 dBm	-138 dBm	-150 dBm	-155 dBm
> 5 GHz to 6 GHz	-126 dBm	-131 dBm	-143 dBm	-150 dBm

**Spurs**

Residual Spurious     < -90 dBm (RF input terminated, 0 dB input attenuation, > 10 MHz)  
 Input-Related Spurious     < -75 dBc (0 dB attenuation, -30 dBm input, span < 1.7 GHz, carrier offset > 4.5 MHz)  
 Exceptions, typical     < -70 dBc @ < 2.5 GHz, with 2072.5 MHz Input  
                                  < -68 dBc @ F1 - 280 MHz with F1 Input  
                                  < -70 dBc @ F1 + 190.5 MHz with F1 Input  
                                  < -52 dBc @ 7349 - (2F2) MHz, with F2 Input, where F2 < 2437.5 MHz  
                                  < -55 dBc @ 190.5  $\pm$  (F1/2) MHz, where F1 < 1 GHz

**Third-Order Intercept (TOI)**

Preamp Off (-20 dBm tones 100 kHz apart, 10 dB attenuation)  
 800 MHz     +16 dBm  
 2400 MHz     +20 dBm  
 200 MHz to 2200 MHz     +25 dBm, typical  
 > 2.2 GHz to 5.0 GHz     +28 dBm, typical  
 > 5.0 GHz to 6.0 GHz     +33 dBm, typical

**Second Harmonic Distortion**

Preamp Off, 0 dB input attenuation, -30 dBm input  
 50 MHz     -56 dBc  
 > 50 MHz to 200 MHz     -60 dBc, typical  
 > 200 MHz to 3000 MHz     -70 dBc, typical

**VSWR**

2:1, typical

 **Coverage Mapping (Option 431)** (requires Option 31 GPS)

**Measurements**

Indoor Mapping	RSSI, ACPR
Outdoor Mapping	RSSI, ACPR

**Setup Parameters**

Frequency	Center/Start/Stop, Span, Freq Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
BW	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/VBW
Measurement Setup	ACPR, RSSI
Point Distance / Time Setup	Repeat Type Time Distance
Save Points Map	Save KML, JPEG, Tab Delimited
Recall Points Map	Recall Map, Recall KML Points only, Recall KML Points with Map, Recall Default Grid

 **Electromagnetic Field Test (Option 444)**

**Measurements**

Setup	Limit lines, axis dwell time, measurement time, auto-logging, measurement units, trace display
Spectrum Analyzer	Field strength is measured
LTE OTA, TD-LTE OTA	P-SS, S-SS, and RS are measured and displayed based on each Cell ID received
W-CDMA OTA	P-CPICH signals are measured and displayed for each Scrambling Code measured
Units	Spectrum Analyzer: dBm/m <sup>2</sup> , dBV/m, dBmV/m, dBuV/m, V/m, W/m <sup>2</sup> , dBW/m <sup>2</sup> , A/m, dBA/m, W/cm <sup>2</sup> LTE OTA, TD-LTE OTA: dBm/m <sup>2</sup> , V/m, W/m <sup>2</sup> W-CDMA OTA: dBm/m <sup>2</sup> , V/m, W/m <sup>2</sup> , % of Limit (V/m), % of Limit (W/m <sup>2</sup> )
Results	Maximum, minimum, and average of all measurements conducted
Display	Measurement status, number of measurements taken, pass/fail indicators

**Frequency Range**

**Supported Antenna**

2000-1800-R	9 kHz to 300 MHz
2000-1792-R	30 MHz to 3 GHz
2000-1791-R	700 MHz to 6 GHz

**Modes where EMF Measurements Available**

- Spectrum Analyzer
- LTE OTA (Option 883)
- TD-LTE OTA (Option 883)
- W-CDMA OTA (Option 881)

**Ethernet Connectivity (formerly Option 413)**

Connector	RJ45
LAN Speed	10 Mbps
Mode	Static, DHCP
Static IP settings	IP address Subnet Mask IP Gateway
Remote Control	Remote capability provided with Web Remote Control and SCPI programming
Data Upload	With Line Sweep Tools through Ethernet connection



 **Interference Analyzer (Option 25)**

**Measurements**

Spectrum	Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power Ratio (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I)
Spectrogram	Collect data up to one week
Signal Strength	Gives visual and aural indication of signal strength
Received Signal Strength Indicator (RSSI)	Collect data up to one week
Signal ID	Up to 12 signals Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers Signal-to-Noise Ratio (SNR) > 10 dB
Interference Mapping	Draw multiple bearings of signal strength from GPS location on on-screen map Pan and Zoom on-screen maps Support for MA2700A Handheld Interference Hunter (see Optional Accessories)
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

**GPS Receiver (Option 31)** (antenna sold separately)

**General**

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy	Spectrum Analyzer, Interference Analyzer, CW Signal Analyzers < ± 50 ppb with GPS On, GPS antenna connected, 3 minutes after satellite lock in selected mode
Connector	SMA, Female

 **Channel Scanner (Option 27)**

**General**

Number of Channels	1 to 20 Channels
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Frequency/Channel, Current/Maximum, Single/Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	9 kHz to 6 GHz
Frequency Accuracy	± 10 Hz + Time base error
Measurement Range	-110 dBm to +26 dBm
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

 **CW Signal Generator (Option 28)** (requires CW Signal Generator Kit, P/N 69793)

**Setup Parameters**

Frequency	Frequency, Signal Standard, Channel Number, Display Setup Help
Amplitude	Power Level (Low/High), Offset (dB)
Frequency Range	2 MHz to 2 GHz
Frequency Reference	Accuracy: ± 1.5 ppm (25 °C ± 25 °C) + aging, < ± 50 ppb with GPS On
Output Power	High 0 dBm typical, Low -30 dBm typical Attenuator (included in kit 69793): 0 to 90 dB in 1 dB steps

**Gated Sweep (Option 90)**

**General**

Mode	Spectrum Analyzer, Sweep
Trigger	External TTL
Setup	Gated Sweep (On/Off) Gate Polarity (Rising, Falling) Gate Delay (0 ms to 65 ms typical) Gate Length (1 μs to 65 ms typical) Zero Span Time



**Power Meter**

**General**

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Full Band
Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	Acquisition Fast/Med/Slow, # of Running Averages
Limits	Limit On/Off, Limit Upper/Lower
Frequency Range	10 MHz to 6 GHz
Span	1 kHz to 100 MHz
Display Range	-140 dBm to +30 dBm, ≤ 40 dB span
Measurement Range	-120 dBm to +26 dBm
Offset Range	0 dB to +100 dB (External Gain or Loss)
VSWR	2:1 typical
Maximum Continuous Input Power	+30 dBm
Accuracy	Same as Spectrum Analyzer
Application Options	Impedance (50 Ω, 75 Ω, Other)



**High Accuracy Power Meter (Option 19)** (requires external USB Power Sensor)

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale				
Average	# of Running Averages, Max Hold				
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)				
Limits	Limit On/Off, Limit Upper/Lower				
Power Sensor Model	MA24105A	MA24106A	MA24108A/18A/26A	MA24208A/18A	MA24330A/40A/50A
Description	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor	Microwave Universal USB Power Sensor	Microwave CW USB Power Sensor
Frequency Range	350 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8/18/26 GHz	10 MHz to 8/18 GHz	10 MHz to 33/40/50 GHz
Connector	Type N(f), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (8/18 GHz) Type K(m), 50 Ω (26 GHz)	Type N(m), 50 Ω	Type K(m), 50 Ω (33/40 GHz) Type V(m), 50 Ω (50 GHz)
Dynamic Range	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)	-60 dBm to +20 dBm (1 nW to 100 mW)	-70 dBm to +20 dBm (0.1 nW to 100 mW)
Measurand	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power	True-RMS, Slot Power, Burst Average Power	Average Power
Measurement Uncertainty	± 0.17 dB <sup>a</sup>	± 0.16 dB <sup>b</sup>	± 0.18 dB <sup>c</sup>	± 0.17 dB <sup>d</sup>	± 0.17 dB <sup>e</sup>
Data sheet (for complete specifications)	11410-00621	11410-00424	11410-00504	11410-00841	11410-00906

- Notes:
- a. Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.
  - b. Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
  - c. Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
  - d. Power uncertainty expressed with two sigma confidence level for CW measurement after zero operation. Includes calibration factor and linearity over temperature uncertainties, but not the effects of mismatch, zero set and drift, or noise.
  - e. Includes linearity over temperature uncertainties, but not the effects of calibration factor, mismatch, zero set and drift, and noise.

**RF over Fiber Hardware (Option 759)**

Must be ordered with either Option 752: CPRI LTE RF measurements, or Option 753: OBSAI LTE RF measurements

**Operating Temperature**

Range -10 °C to +45 °C

**RF over Fiber Interface**

Connector Port Small form factor pluggable (SFP) optical transceiver port



**CPRI LTE RF Signal Analyzer (Option 752)** (requires Option 759)

**Measurements** (CPRI RF measurements support LTE technology)

Spectrum	Uplink or Downlink Spectrum
Spectrogram	Collects data up to one week
CPRI Alarms	Signal Level (Tx Power, Rx Power), Signal Loss, LOS, LOF, LSS, Remote LOS, Remote LOF, RAI, SDI, Reset
SFP Data	Reads device information
CPRI IQ Data Capture	Quick Save IQ Data, Playback IQ Data

**Setup Parameters**

Frequency	Center, Span (Span, Full Span), Signal Standard, Channel #, CF Reference (On/Off) <sup>1</sup>
Amplitude	Reference Level (RL), Scale, RL Offset
Bandwidth	RBW, Auto RBW, VBW, Auto VBW
Measurements	CPRI Configure, CPRI Spectrum, Spectrogram, CPRI Alarms, SFP Data (SFP Info/Compliance Info)
CPRI Configure	SFP Port Configure, Display Configure, AxC Trace Configure
SFP Port Configure	Line Rate, Radio Presets, Auto Detect
Display Configure	Display 1 and 2 CPRI BW, Display Mode (Single, Dual), Active Display
AxC Trace Configure	AxC 1, 2, 3, and 4 (Display, SFP Port, AxC Group, Sampling Rate (Default, Compress))
Radio Presets	Ericsson (Uplink/Downlink), Nokia/ALu (Uplink/Downlink), Huawei (Uplink/Downlink), Samsung (Uplink/Downlink), No Preset, Custom
Custom	IQ Bit Width, IQ Mapping (Method1, Method3), No. of Reserve Bits, Aggregation (On/Off)
Auto Detect	Radio Preset, IQ Bit Width, Reserve Bit, Aggregation, Start Auto Detect

**Sweep Functions**

Sweep	Single/Continuous, Sweep Once, Sweep 10 Averages
-------	--

**Trace Functions** (AxC Trace 1 only)

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ← → C, Max Hold, Min Hold
Trace C Operations	A → C, B ← → C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale

**Marker Functions** (AxC Traces 1 through 4)

Markers	Markers 1-6 On/Off, Delta Marker On/Off, Marker Frequency to Center, Marker Table (On, Large, Off), All Markers Off
Marker Table	Markers 1-6 for frequency and amplitude, plus delta markers frequency offset and amplitude

**Limit Line Functions**

Limit Lines	Upper/Lower, On/Off, Move, Save/Recall Limit, Limit Alarm On/Off, Default Limit
Limit Line Move	Move Up/Down, to Amplitude

**Display Functions**

Active Display	Display 1 or 2 (Single Display or Dual Display)
Display Spectrum	Single or Dual
Single Spectrum Display	One, two, three, or four AxC traces displayed (color coded), same CPRI BW for AxC traces
Dual Spectrum Display	Any combination of the four available AxC traces, same CPRI BW per display and AxC trace
Display Spectrogram	Single or Dual
Single Spectrogram Display	One active AxC trace per waterfall display
Dual Spectrogram Display	Any combination of the four available AxC traces may be configured per display
AxC Trace (1, 2, 3, 4)	One active AxC trace per waterfall display
	Display 1, 2, or off
	AxC Group
	Sampling Rate (Default, Compress)

1. CF Reference is available only when Display 1 is active.



**CPRI LTE RF Signal Analyzer (Option 752)** (continued)

**Bandwidth**

Resolution Bandwidth (RBW)	300 Hz to 1 MHz in 1-3-10 sequence $\pm 10\%$ (-3 dB bandwidth point) typical
Video Bandwidth (VBW)	30 Hz to 1 MHz in 1-3-10 sequence $\pm 10\%$ (-3 dB bandwidth) typical
Line Bit Rate	Line bit rate 1: 614.4 Mbit/s Line bit rate 2: 1228.8 Mbit/s Line bit rate 3: 2457.6 Mbit/s Line bit rate 4: 3072.0 Mbit/s Line bit rate 5: 4915.2 Mbit/s Line bit rate 6: 6144.0 Mbit/s Line bit rate 7: 9830.4 Mbit/s Line bit rate 8: 10137.6 Mbit/s

**CPRI Parameters**

IQ Sample Width	10 bits, 12 bits, 15 bits, 16 bits
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz
Aggregation	On/Off



**OBSAI LTE RF Signal Analyzer (Option 753)** (requires Option 759)

**Measurements** (OBSAI RF measurements support LTE technology)

Spectrum	Uplink or Downlink Spectrum
Spectrogram	Collects data up to one week
OBSAI Alarms	Signal Level (Tx Power, Rx Power), Signal Loss, LOS, LOF
SFP Data	Reads device information

**Setup Parameters**

Frequency	Center, Span (Span, Full Span), Signal Standard, Channel #, CF Reference (On/Off) <sup>1</sup>
Amplitude	Reference Level (RL), Scale, RL Offset
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, LTE Bandwidth
Measurements	Start OBSAI, OBSAI Configure, OBSAI Spectrum, Spectrogram, OBSAI Alarms, SFP Data (SFP Info/Compliance Info)
Start OBSAI	Scans OBSAI link for active RP3 addresses; detects and sets link rate; configures first RP3 address and displays a Spectrum view.
OBSAI Configure	Link Rate, Display Configure, Carrier Trace Configure
Display Configure	Display 1 and 2 LTE BW, Display Mode (Single, Dual), Active Display
Carrier Trace Configure	Carrier Trace 1 (Display 1, 2, or off; RP3 Address) Carrier Trace 2 (Display 1, 2, or off; RP3 Address) Carrier Trace 3 (Display 1, 2, or off; RP3 Address) Carrier Trace 4 (Display 1, 2, or off; RP3 Address)
RP3 Address	RP3 list populated with Start OBSAI or plug-in of an active link Addresses removed from list upon fiber plug-out or Loss of Signal Address list is empty following power cycle or if no OBSAI carriers are found

**Sweep Functions**

Sweep	Single/Continuous, Sweep Once, Sweep 10 Averages
-------	--

**Trace Functions** (Carrier Trace 1 only)

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ← → C, Max Hold, Min Hold
Trace C Operations	A → C, B ← → C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale

**Marker Functions** (Carrier Traces 1 through 4)

Markers	Markers 1-6 On/Off, Delta On/Off, Marker Freq to Center, Marker Table (On, Large, Off), All Markers Off
Marker Table	Markers 1-6 for frequency and amplitude, plus delta markers frequency offset and amplitude

**Limit Line Functions**

Limit Lines	Upper/Lower, On/Off, Move, Save/Recall Limit, Limit Alarm On/Off, Default Limit
Limit Line Move	Move Up/Down, to Amplitude

**Display Functions**

Active Display	Display 1 or 2 (Single Display or Dual Display)
Display Spectrum	Single or Dual
Single Spectrum Display	One, two, three, or four carrier traces displayed (color coded) Trace LTE BW must match display LTE BW to be visible
Dual Spectrum Display	Any combination of the four available carrier traces, same LTE BW per display and carrier trace
Display Spectrogram	Single or Dual
Single Spectrogram Display	One active carrier trace per waterfall display
Dual Spectrogram Display	Any combination of the four available carrier traces may be configured per display One active carrier trace per waterfall display
Carrier Trace (1, 2, 3, 4)	Display 1, 2, or off

**Bandwidth**

Resolution Bandwidth (RBW)	300 Hz to 1 MHz in 1-3-10 sequence ±10 % (-3 dB bandwidth point) typical
Video Bandwidth (VBW)	30 Hz to 1 MHz in 1-3-10 sequence ±10 % (-3 dB bandwidth) typical
Link Rate	1x: 768.0 Mbit/s 2x: 1536.0 Mbit/s 4x: 3072.0 Mbit/s 8x: 6144.0 Mbit/s
LTE Bandwidth	5 MHz, 10 MHz, 15 MHz <sup>2</sup> , 20 MHz

1. CF Reference is available only when Display 1 is active.  
2. Only supports Dual Bit Map algorithm for 15 MHz bandwidth signals.

 LTE/LTE-A Signal Analyzers (Options 883 and 886)<sup>1</sup>

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Power vs. Resource Block (RB)	Scanner	View Pass/Fail Limits
Channel Power	RB Power (PDSCH)	Cell ID (Group, Sector)	All, RF, Modulation
Occupied Bandwidth	Active RBs, Utilization %,	S-SS Power, RSRP, RSRQ, SINR	
Power vs. Time (TDD only)	Channel Power, Cell ID	Dominance	Available Measurements
Frame View	OSTP, Frame EVM by modulation	Modulation Results – On/Off	Channel Power
Sub-Frame View	Constellation	Auto Save - On/Off	Occupied Bandwidth
Total Frame Power	QPSK, 16QAM, 64QAM	Tx Test	ACLR
DwPTS Power	256QAM Demod (Option 886)	Scanner	Frequency Error
Transmit Off Power	Modulation Results	RS Power of MIMO antennas	Carrier Frequency
Cell ID	Ref Signal Power (RS)	(FDD: 2x2, 4x4)	Dominance
Timing Error	Sync Signal Power (SS)	(TDD: 2x2, 4x4)	EVM peak, rms
ACLR	EVM – rms, peak, max hold	Cell ID, Average Power	Frame EVM, rms
Spectral Emission Mask	Frequency Error – Hz, ppm	Delta Power (Max-Min)	Frame EVM by mod type
Category A or B (Opt 1)	Carrier Frequency	Graph of Antenna Power	RS, SS Power
RF Summary	Cell ID	Modulation Results – On/Off	RS EVM
	Control Channel Power	Mapping	P-SS, S-SS, Power, EVM
	Bar Graph or Table View	On-screen	PBCH, PCFICH, PHICH, PDCCH
	RS, P-SS, S-SS	S-SS Power, RSRP, RSRQ, or SINR	Power, EVM
	PBCH, PCFICH, PHICH, PDCCH	Scanner	Cell, Group, Sector ID
	Total Power (Table View)	Modulation Results – Off	OSTP
	EVM per Control Channel	Carrier Aggregation	Tx Time Alignment
	Tx Time Alignment	Up to 5 component carriers (CC1 to CC5)	Frame Power (TDD only)
	Modulation Summary	CP, MIMO status, RS & SS Power, EVM,	DwPTS Power (TDD only)
	Includes EVM by modulation	Frequency Error, Time Alignment Error,	Transmit Off Power (TDD only)
	Antenna Icons	Cell ID	Timing Error (TDD only)
	Detects active antennas (1/2)		

**Setup Parameters**

Frequency	E-UTRA FDD bands 1 – 14, 17 – 21, 23 – 32, 66A (tunable 10 MHz to 4.0 GHz) E-UTRA TDD bands 33 – 44 (tunable 10 MHz to 4.0 GHz) Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Bandwidth (MHz)	1.4, 3, 5, 10, 15, 20
Span (MHz)	Auto, 1.4, 3, 5, 10, 15, 20, 30
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Cyclic Prefix (CP)	Auto, Normal, Extended
EVM Mode	Auto, PBCH only, Max Hold
Sync Type	Normal (SS), RS/Cell ID
Trigger	No Trigger/Ext Trigger, Rising/Falling (TDD Only)
Uplink/Downlink Configuration	0 to 6 (TDD Only)
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**LTE/LTE-A RF Measurements**

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input –50 dBm to +10 dBm) ± 1.5 dB, ± 1.0 dB typical, (RF input –30 dBm to +10 dBm)
---------------------------	--

**LTE/LTE-A Modulation Measurements**

Frequency Error	± 10 Hz + time base error, 99 % confidence level
Residual EVM (rms) (FDD only)	2.0% typical (E-UTRA Test Model 3.1, RF Input –50 dBm to +10 dBm) for BW ≤ 10 MHz 2.5% typical (E-UTRA Test Model 3.1, RF Input –50 dBm to +10 dBm) for BW > 10 MHz
Residual EVM (rms) (TDD only)	2.0% typical (E-UTRA Test Model 3.1, RF Input –30 dBm to +10 dBm) for BW ≤ 10 MHz 2.5% typical (E-UTRA Test Model 3.1, RF Input –30 dBm to +10 dBm) for BW > 10 MHz

**LTE/LTE-A Over-the-Air (OTA) Measurements**

Scanner	Six strongest signals if present Auto Save — Sync Signal Power and Modulation Results with GPS information
Tx Test	Scanner — three strongest signals if present RS Power — strongest signal
Mapping	Map On-screen S-SS Power, RSRP, RSRQ, or SINR of Cell ID with strongest signal Scanner — three strongest signals if present Save and Export Mapping data: KML, MTD (tab delimited)
Carrier Aggregation	Up to 5 component carriers specified (CC1 to CC5) Automatic detection of CP and MIMO status for each active CC RS Power & RS Delta Power, SS Power, EVM (peak and rms), Freq Error (Hz & ppm), TAE, Cell ID

1. Requires Option 31 for full functionality.



**NB-IoT Analyzer (Option 887)**

**Measurements**

NB-IoT Mode    Guard Band, Standalone

**RF Measurements**

Summary Screen	Carrier Frequency Channel Power Occupied Bandwidth NPSS Power NSSS Power NPBCH Power NPDCCH or NPDSCH Power Cell ID RSRP RSRQ SINR Spectral Emission Mask Pass/Fail
Channel Spectrum	Spans supported: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz
Spectral Emission Mask	Mask Type: NB-IoT Fixed Summary Table Off/On (Mask Segment; Start, Stop, Peak Frequencies; Power; Power Margin; RBW; Status)
Save/Recall	Measurement (.iot), Setup (.stp), Screen Shots (.jpg) to Internal or External Memory



**GSM/EDGE Signal Analyzer (Option 880)**

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC) Multi-channel Spectrum Power vs. Time (Frame/Slot) Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC)	Phase Error EVM Origin Offset C/I Modulation Type Magnitude Error BSIC (NCC, BCC)	There are no additional OTA Measurements. RF and Demodulation measurements can be made OTA	View Pass/Fail Limits GSM, EDGE Available Measurements Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Phase Error EVM Origin Offset C/I Magnitude Error Script Master™

**Setup Parameters**

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99 % confidence level
Occupied Bandwidth	Bandwidth within which lies 99 % of the power transmitted on a single channel
Burst Power Error	± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)

**Demodulation** (temperature range 15 °C to 35 °C)

GMSK Modulation Quality (RMS Phase)	
Measurement Accuracy	± 1 deg
Residual Error (GMSK)	1 deg
8 PSK Modulation Quality (EVM)	
Measurement Accuracy	± 1.5 %
Residual Error (8 PSK)	2.5 %



 **W-CDMA/HSPA+ Signal Analyzer (Option 881)<sup>1</sup>**

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Band Spectrum	Code Domain Power Graph	Scrambling Code Scanner (Six)	View Pass/Fail Limits
Channel Spectrum	P-CPICH Power	Scrambling Codes	All, RF, Demod
Channel Power	Channel Power	CPICH	Available Measurements
Occupied Bandwidth	Noise Floor	EC/IO	Max Output Power
Peak-to-Average Power	EVM	EC	Frequency Error
Spectral Emission Mask	Carrier Feed Through	Pilot Dominance	EVM
Single Carrier ACLR	Peak Code Domain Error	OTA Total Power	CPICH
Multi-carrier ACLR	Carrier Frequency	Multipath Scanner (Six)	Occupied Bandwidth
RF Summary	Frequency Error	Six Multipaths	Spectral Mask
	Control Channel Power	Tau	ACLR
	Abs/Rel/Delta Power	Distance	PCDE
	CPICH, P-CCPCH	RSCP	P-CCPCH
	S-CCPCH, PICH	Relative Power	S-CCPCH
	P-SCH, S-SCH	Multipath Power	Code Spread 3
	HSPA+		PICH
	Power vs. Time		Code 128
	Constellation		Script Master™
	Code Domain Power Table		Test Models
	Code, Status		1 (16), (32), (64)
	EVM, Modulation Type		2
	Power, Code Utilization		3 (16), (32)
	Power Amplifier Capacity		4 (+CPICH), (-CPICH)
	Codogram		5 (2 HS), (4 HS), (8 HS)
	Modulation Summary		

**Setup Parameters**

Scrambling Code, Threshold	Auto, Manual
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average
Maximum Spreading Factor	256, 512
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Marker	Six Markers, Table On/Off
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.25 dB, ± 0.7 dB typical
Occupied Bandwidth Accuracy	± 100 kHz
Adjacent Channel Leakage Ratio (ACLR)	-54 dB/-59 dB ± 0.8 dB @ 5 MHz/10 MHz offset, typical, 824 MHz to 894 MHz, 1710 MHz to 2170 MHz -54 dB/-57 dB ± 1.0 dB @ 5 MHz/10 MHz offset, typical, 2300 MHz to 2700 MHz

**Demodulation** (temperature range 15 °C to 35 °C)

W-CDMA Modulations	QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12.2 kbps)
HSPA+ Modulations	QPSK, 16QAM, 64QAM
Frequency Error	± 10 Hz + time base error, 99% confidence level
EVM Accuracy	± 2.5 %, 6% ≤ EVM ≤ 25%
Residual EVM	3.25% typical
Code Domain Power	± 0.5 dB for code channel power > -25 dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)
CPICH (dBm) Accuracy	± 0.8 dB typical

**Over-the-Air (OTA) Measurements**

Scrambling Code Scanner	Six strongest Scrambling Codes
Multipath Scanner	Multipath power of six signals relative to strongest pilot

1. Option 31 recommended.

 **CDMA Signal Analyzer (Option 884)<sup>1</sup>**

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Single Carrier ACPR Multi-carrier ACPR RF Summary	Code Domain Power Graph Pilot Power Channel Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Frequency Error Abs/Rel/ Power Pilot Page Sync Q Page Code Domain Power Table Code Status Power Multiple Codes Code Utilization Modulation Summary	Pilot Scanner (Nine) PN EC/IO Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) EC/IO Tau Channel Power Multipath Power Limit Test - 10 Tests Averaged Rho Adjusted Rho Multipath Pilot Dominance Pilot Power Pass/Fail Status	View Pass/Fail Limits All, RF, Modulation Available Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Mask Test Frequency Error Channel Frequency Pilot Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Code Utilization Measured PN Pilot Dominance Multipath Power

**Setup Parameters**

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth (MHz)	1.23, 1.24, 1.25
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**Demodulation** (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99 % confidence level (in slow mode)
Rho Accuracy	± 0.005, for Rho > 0.9
Residual Rho	> 0.995, typical, > 0.99 maximum, (RF input -50 dBm to +20 dBm)
PN Offset	1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ± 1.0 µs maximum

**Over-the-Air (OTA) Measurements**

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot
Limit Test	Average of ten tests compared to limit

1. Requires Option 31 for full functionality.

 EV-DO Signal Analyzer (Option 884)<sup>1</sup>

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	MAC Code Domain Power Graph	Pilot Scanner (Nine)	View Pass/Fail Limits
Channel Power	Pilot & MAC Power	PN	All, RF, Modulation
Occupied Bandwidth	Channel Power	EC/IO	Available Measurements
Peak-to-Average Power	Frequency Error	Tau	Channel Power
Power vs. Time	Rho Pilot	Pilot Power	Occupied Bandwidth
Pilot & MAC Power	Rho Overall	Channel Power	Peak-to-Average Power
Channel Power	Data Modulation	Pilot Dominance	Carrier Frequency
Frequency Error	Noise Floor	Multipath Scanner (Six)	Frequency Error
Idle Activity	MAC Code Domain Power Table	EC/IO	Spectral Mask
On/Off Ratio	Code	Tau	Noise Floor
Spectral Emission Mask	Status	Channel Power	Pilot Power
Single Carrier ACPR	Power	Multipath Power	RMS Phase Error
Multi-carrier ACPR	Code Utilization		Tau
RF Summary	Data Code Domain Power		Code Utilization
	Active Data Power		Measured PN
	Data Modulation		Pilot Dominance
	Rho Pilot		Multipath Power
	Rho Overall		
	Maximum Data CDP		
	Minimum Data CDP		
	Modulation Summary		

**Setup Parameters**

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Slot Type	Auto, Active, Idle
Number of Carriers	1 to 5
Carrier Bandwidth (MHz)	1.23, 1.24, 1.25
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**Demodulation** (temperature range 15 °C to 35 °C)

EV-DO Compatibility	Rev 0 and Rev A
Frequency Error	± 10 Hz + time base error, 99 % confidence level
Rho Accuracy	± 0.01, for Rho > 0.9
Residual Rho	> 0.995 typical, > 0.99, maximum (RF input -50 dBm to +20 dBm)
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ±1.0 µs maximum

**Over-the-Air (OTA) Measurements**

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot

1. Requires Option 31 for full functionality.

**FW Fixed WiMAX Signal Analyzer (Option 885)<sup>1</sup>**

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Power vs. Time Channel Power Preamble Power Data Burst Power Crest Factor ACPR RF Summary	Constellation RCE (RMS/Peak) EVM (RMS/Peak) Frequency Error Carrier Frequency Base Station ID Spectral Flatness Adjacent Subcarrier Flatness EVM vs. Subcarrier/Symbol RCE EVM Frequency Error Carrier Frequency Base Station ID Modulation Summary	There are no additional OTA Measurements. RF and Demodulation measurements can be made OTA	View Pass/Fail Limits All, RF, Modulation Available Measurements Channel Power Occupied Bandwidth Burst Power Preamble Power Crest Factor Frequency Error Carrier Frequency EVM RCE Base Station ID

**Setup Parameters**

Bandwidth (MHz)	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00
Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32
Span (MHz)	5, 10, 15, 20
Frame Length (ms)	2.5, 5.0, 10.0
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**Demodulation** (temperature range 15 °C to 35 °C)

Frequency Error 0.07 ppm + time base error, 99 % confidence level  
Residual EVM (rms) 3 % typical, 3.5 % maximum (RF input -50 dBm to +20 dBm)

1. Requires Option 31 for full functionality.

 **Mobile WiMAX Signal Analyzer (Option 885)<sup>1</sup>**

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Constellation	Channel Power Monitor	View Pass/Fail Limits
Channel Power	RCE (RMS/Peak)	Preamble Scanner (Six)	All, RF, Modulation
Occupied Bandwidth	EVM (RMS/Peak)	Preamble	Available Measurements
Power vs. Time	Frequency Error	Relative Power	Channel Power
Channel Power	CINR	Cell ID	Occupied Bandwidth
Preamble Power	Base Station ID	Sector ID	Downlink Burst Power
Downlink Burst Power	Sector ID	PCINR	Uplink Burst Power
Uplink Burst Power	Spectral Flatness	Dominant Preamble	Preamble Power
ACPR	Adjacent Subcarrier Flatness	Base Station ID	Crest Factor
Spectral Emission Mask	EVM vs. Subcarrier/Symbol	Auto Save - On/Off	Frequency Error
RF Summary	RCE (RMS/Peak)		Carrier Frequency
	EVM (RMS/Peak)		EVM
	Frequency Error		RCE
	CINR		Sector ID
	Base Station ID		
	Sector ID		
	DL-MAP (Tree View)		
	Modulation Summary		

**Setup Parameters**

Zone Type	PUSC
DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)
Bandwidth (MHz)	3.50, 5.00, 7.00, 8.75, 10.00
Cyclic Prefix Ratio (CP)	1/8
Span (MHz)	5, 10, 20, 30
Frame Length (ms)	5, 10
Demodulation	Auto, Manual, FCH
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy ± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)

**Demodulation** (temperature range 15 °C to 35 °C)

Frequency Error 0.02 ppm + time base error, 99 % confidence level  
Residual EVM (rms) 2.5 % typical, 3.0 % maximum, (RF Input -50 dBm to +20 dBm)

**Over-the-Air (OTA) Measurements**

Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 s
Preamble Scanner	Six Strongest Preambles
Auto Save	Yes
GPS Logging	Yes

1. Requires Option 31 for full functionality.

Mobile WiMAX conforms to IEEE Std. 802.16e-2005, WiMAX Forum<sup>®</sup> Air Interface - Mobile System Profile - Release 1.0 Certified, System Profiles according to WMF-T24-001-R010v07.

 TD-SCDMA/HSPA+ Signal Analyzer (Option 882)<sup>1</sup>

**Measurements**

RF	Demodulation	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Code Domain Power/Error (QPSK/8 PSK/16QAM/64QAM)	Code Scan (32)	View Pass/Fail Limits
Channel Power	Slot Power	Scrambling Code Group	All, RF, Demod
Occupied Bandwidth	DwPTS Power	Tau	Available Measurements
Left Channel Power	Noise Floor	EC/IO	Occupied Bandwidth
Left Channel Occ B/W	Frequency Error	DwPTS Power	Channel Power
Right Channel Power	Tau	Pilot Dominance	Channel Power RCC
Right Channel Occ B/W	Scrambling Code	Tau Scan (Six)	On/Off Ratio
Power vs. Time	EVM	Sync-DL#	Peak-to-Average Ratio
Six Slot Powers	Peak EVM	Tau	Frequency Error
Channel Power (RRC)	Peak Code Domain Error	EC/IO	EVM
DL-UL Delta Power	CDP Marker	DwPTS Power	Peak EVM
UpPTS Power	Modulation Summary	Pilot Dominance	Peak Code Domain Error
DwPTS Power		Record	Tau
On/Off Ratio		Run/Hold	Noise Floor
Slot Peak-to-Average Power			
Spectral Emission			
RF Summary			

**Setup Parameters**

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0 – 31
Scrambling/Midamble Code	Auto, 0 – 127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8PSK, 16QAM, 64QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (JPEG - save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Measurements

**RF Measurements** (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy (RRC)	± 1.5 dB, ±1.0 dB typical, (slot power -40 dBm to +10 dBm)
Frequency Error	±10 Hz + time base error, in the presence of a downlink slot

**Demodulation** (temperature range 15 °C to 35 °C)

Supported Demodulation	QPSK, 8PSK, 16QAM, 64QAM
Residual EVM (rms)	3 % typical, P-CCPH slot power > -50 dBm
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical
Timing Error (Tau) for Dominant SYNC-DL	± 0.2 μs (external trigger)
Spreading Factor	1, 16

**Over-the-Air (OTA) Measurements**

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Logging	Yes

1. Requires Option 31 for full functionality.

 ISDB-T Signal Analyzer (Options 30, 79, 32)<sup>1</sup>

**Measurements**

ISDB-T RF (Option 30)	ISDB-T Signal Analysis (Option 30)	ISDB-T BER Analysis (Option 79)	ISDB-T SFN Analysis (Option 32)
Signal Power	Constellation (w/zoom)	Layer A, Layer B, Layer C	Impulse Response (w/zoom)
Channel Power	Layer A, B, C, TMCC	BER and Error Count per Layer	In-band Spectrum
Termination Voltage	Sub-carrier MER	Before RS	Measured Data
Open Terminal Voltage	Delay Profile (w/zoom)	Before Viterbi	Channel Power
Field Strength	Frequency Response	PER and Error Count per Layer	Delay
Spectrum Monitor	Measured Data	MPEG Bit Rate per Layer	DU Ratio
Channel Power	Frequency	TMCC Information per Layer	Power
Zone Center Channel	Frequency Offset	Modulation	Field Strength
Zone Center Frequency	MER (Total, Layer A/B/C, TMCC, AC1)	Code Rate	
Spectrum Mask	Modulation (Layer A/B/C)	Interleave	
Mask (Standard A) Japan	Mode, GI	Segments	
Mask (Standard B) Japan	Sub-carrier MER w/marker	Channel Power	
Mask (Critical) Brazil	Delay w/marker	Mode, GI	
Mask (Sub-critical) Brazil	Frequency Response w/marker	Signal Sync Status	
Mask (Non-critical) Brazil		ASI Out	
Phase Noise			
Spurious Emissions			

**ISDB-T Measurement Modes**

Custom	User specified measurements and setup parameters
Easy	User specified measurements. Some setup parameters are automatically set or detected.
Batch	User specified measurements and channels for automatic measurement, and display and storage of results

**Setup Parameters**

Channel Map	UHF (Japan), UHF (Brazil), IF (37.15 MHz), None
Channel	13 to 62 (Japan), 14 to 69 (Brazil)
Frequency	35 MHz to 806 MHz
Bandwidths	6 MHz, 8 MHz
Partial Reception	Recognized when layer A segment count is 1
One-Seg	On: synchronizes with single segment transmission (Bandwidth 6 MHz only) Off: synchronizes with normal 13 segment signal
Pre-amp	On, Off
Reference Level Setting	-25 dBm to +20 dBm/5 dB steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)

**ISDB-T Digital Video Measurements (Option 30)**

Channel Power Accuracy	± 2 dB, (RF input -84 dBm to -10 dBm)
Frequency Lock Range	± 90 kHz
Frequency Offset Accuracy	± (measurement frequency x reference frequency accuracy) ± 0.3 Hz
Residual MER	≥ 42 dB, typical (Preamp Off, Reference level: -20 dBm) ≥ 37 dB, typical (Preamp On, Reference level: -50 dBm)
Sub-carrier MER Display Range	± 2.785 MHz from center frequency (Bandwidth 6 MHz) ± 3.714 MHz from center frequency (Bandwidth 8 MHz)
Delay Profile Resolution	0.12 μs (Bandwidth 6 MHz) 0.09 μs (Bandwidth 8 MHz)
Frequency Response Resolution	1 kHz, 0.1 dB
Phase Noise Range	-40 dBc/Hz to -140 dBc/Hz
Spurious Emissions Search Range	5 MHz to 5x input signal frequency

**ISDB-T BER Measurements (Option 79)** (temperature range 0 °C to 40 °C)

BER Measurement Display per Layer	Rate and Error count: Before Viterbi, Before RS
PER Measurement Display per Layer	Rate and Error count
TMCC Information Display per Layer	Modulation, Code Rate, Interleave, Number of segments
ASI Output	BNC-J 75 Ω

**ISDB-T SFN Measurements (Option 32)**

Delay Profile Display Range	-1008 μs to +1008 μs (Bandwidth 6 MHz)
Delay Wave Estimated Level Accuracy	± 2.5 dB typical (-10 dBm to -79 dBm)
DU Ratio Accuracy	± 1 dB typical (-10 dBm to -70 dBm)
Inband Spectrum Range	± 2.74 MHz (Mode 2), ± 2.76 MHz (Mode 3) (Bandwidth 6 MHz)

1. For full specifications, refer to the Digital Broadcast Analysis Options Technical Data Sheet 11410-00624.

 **DVB-T/H Signal Analyzer (Options 64, 57, 78)<sup>1</sup>**

**Measurements**

DVB-T/H RF (Option 64)	DVB-T/H Signal Analysis (Option 64)	DVB-T/H BER Analysis (Option 57)	DVB-T/H SFN Analysis (Option 78)
Signal Power	Composite or Individual Views	BER	Impulse Response (w/zoom)
Channel Power	Constellation	Before RS	Inband Spectrum
Termination Voltage	Impulse Response (w/zoom)	Before Viterbi	Measured Data
Open Terminal Voltage	Carrier MER (w/zoom)	PER (Packet)	Channel Power
Field Strength	Freq Response (composite view only)	Channel Power	Delay
Spectrum Monitor	Measured Data	MER (Quick)	DU Ratio
Channel Power	Mode, GI	Bit Rate	Power
Zone Center Channel	Modulation	TPS Info	Field Strength
Zone Center Frequency	Hierarchy	Length Indicator	
Shoulder Attenuation	Freq Offset	Mode, GI	
Channel Power	Channel Power	Modulation	
Zone Center Channel	MER (Total/Data/TPS)	Hierarchy	
Zone Center Frequency	TPS Warning Message	Interleave Type	
Lower Shoulder Attenuation	TPS Info	Cell ID	
Upper Shoulder Attenuation	Interleave Type	Code Rate	
	Cell ID	Time Slicing	
	Code Rate (HP/LP)	MPE-FEC	
	Time Slicing (HP/LP)	TPS Warning Message	
	MPE-FEC (HP/LP)	ASI Out	

**Setup Parameters**

Channel Map	UHF (Australia), UHF (Europe), VHF (Europe), None
Channel	28 to 69 (Australia), 21 to 69 (Europe), 5 to 12 (Europe)
Frequency Offset	± 166.666 kHz, ± 333.333 kHz, ± 499.999 kHz, None
Frequency	30 MHz to 2.8 GHz when Channel Map is None
Bandwidth	5*, 6*, 7, 8 MHz (* Not available for BER measurements)
Pre-amp	On, Off
Reference Level	-25 dBm to +20 dBm/5 dB steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)

**DVB-T/H Digital Video Measurements (Option 64)**

Channel Power Accuracy	± 2 dB, (RF input -84 dBm to -10 dBm)
Frequency Lock Range	± 90 kHz
Frequency Offset Accuracy	± (measurement frequency x reference frequency accuracy) ± 0.3 Hz
Residual MER	≥ 42 dB (Preamp Off, Reference Level: -20 dBm) ≥ 37 dB (Preamp On, Reference Level: -50 dBm)
Impulse Response Resolution	0.11 µs (Bandwidth: 8 MHz), 0.1 dB
Carrier MER Marker	Carrier Number, Offset Frequency and MER
Composite View	Simultaneous display of Constellation (Data and TPS), Impulse Response, Carrier MER and Frequency Response

**DVB-T/H BER Measurements (Option 57)** (temperature range 0 °C to 40 °C)

Bit Count Setting	Range 1E+6 to 1E+12
Service Type	In Service: BER measurement of normal in-service data traffic Simultaneous BER measurement Before Viterbi and Before RS error correction Out of Service: BER measurement of a PRBS23 data sequence BER measurement point can be selected Before Viterbi, Before RS or After RS
TPS Information	Length indicator, Mode, GI, Modulation, Hierarchy, Inner Interleave, Cell ID, Code Rate, Time Slicing, MPE-FEC
ASI Output	BNC-J 75 Ω

**DVB-T/H SFN Measurements (Option 78)**

Impulse Response Display Range	-896 µs to +896 µs (Bandwidth 8 MHz)
Resolution	0.11 µs (33 m) (Bandwidth 8 MHz)
Marker	Delay time, relative level (DU ratio), power and field strength or termination voltage
In-band Spectrum Range	± 3.804 MHz (Bandwidth 8 MHz)

1. For full specifications, refer to the Digital Broadcast Analysis Options Technical Data Sheet 11410-00624.



## General Specifications

<b>System Parameters</b>	System	Status (Temperature, Battery Info, Serial Number, Firmware Version, Options Installed) Self Test, Application Self Test, GPS (see Option 31)
	System Options	Name, Date and Time, Brightness, Volume Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, Russian, Portuguese) Reset (Factory Defaults, Master Reset, Update Firmware)
	Internal Trace/Setup Memory	2,000 traces, 2,000 setups
	External Trace/Setup Memory	Limited by size of USB Flash drive
	Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode
<b>File Management</b>		
	File Types	Vary with measurement mode
	File	Save, Recall, Copy, Delete
	Save	Setups, Measurements, Screen Shots (JPEG)
	Recall	Setups, Measurements
	Copy	Selected file or files to internal/external memory (USB)
	Delete	Selected file or files from internal/external memory (USB)
	File Sort Method	By Name/Date/Type, Ascend/Descend
<b>Connectors</b>		
	RF Out	Type N, female, 50 $\Omega$ (Reflection In)
	RF Out Damage Level	23 dBm (+42 dBm typical), $\pm$ 50 VDC
	RF In	Type N, female, 50 $\Omega$
	RF Input Damage Level	+30 dBm peak, $\pm$ 50 VDC, Maximum Continuous Input ( $\geq$ 10 dB attenuation)
	ASI Output Connector	BNC-J 75 $\Omega$ (with Option 57 or Option 79)
	GPS	SMA(f)
	External Power	5.5 mm barrel connector, 12.5 VDC to 15 VDC, < 4.0 Amps
	USB Interface (2)	Type A (Connect USB Flash Drive and Power Sensor)
	USB Interface	5-pin mini-B (Connect to PC for data transfer and/or remote control)
	Ethernet Interface	RJ45 connector for Ethernet 10-Base T
	Headset Jack	3.5 mm mini-phone plug
	External Reference In	BNC, female, Maximum Input +10 dBm, 1 MHz, 5 MHz, 10 MHz, 13 MHz
	External Trigger/Clock Recovery	BNC, female, Maximum Input $\pm$ 5 VDC
	RF over Fiber	SFP/SFP+ compatible socket (available with Option 759)
<b>Display</b>		
	Type	Resistive Touchscreen
	Size	8.4 inch daylight viewable color LCD
	Resolution	800 x 600
	Pixel Defects	No more than five defective pixels (99.9989% good pixels)
<b>Battery</b>		
	Type	Li-Ion
	Battery Operation	3.0 hours, typical
	Battery Charging Limits	0 $^{\circ}$ C to +45 $^{\circ}$ C, Relative Humidity $\leq$ 80 %
<b>Regulatory Compliance</b>		
	European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
	Australia and New Zealand	RCM AS/NZS 4417:2012
	South Korea	KCC-REM-A21-0004
<b>Environmental</b>		
	MIL-PRF-28800F Class 2	
	Operating Temperature Range	-10 $^{\circ}$ C to 55 $^{\circ}$ C
	Storage Temperature Range	-51 $^{\circ}$ C to 71 $^{\circ}$ C
	Maximum Relative Humidity	95 % RH at 30 $^{\circ}$ C, non-condensing
	Vibration, Sinusoidal	5 Hz to 55 Hz
	Vibration, Random	10 Hz to 500 Hz
	Half Sine Shock	30 g <sub>n</sub>
	Altitude	4600 meters, operating and non-operating
	Explosive Atmosphere	MIL-PRF-28800F, Section 4.5.6.3 MIL-STD-810G, Method 511.5, Procedure 1
<b>ESD</b>		
	RF Port Center Pin	Withstands up to $\pm$ 15 kV
<b>Size and Weight</b>		
	Size	273 mm x 199 mm x 91 mm (10.7 in x 7.8 in x 3.6 in)
	Weight	3.71 kg (8.2 lb)
<b>Warranty</b>		
	Duration	Standard three-year warranty (one-year warranty on battery)

 **Line Sweep Tools** (for your PC)

**Trace Capture**

Browse to Instrument	View and copy traces from the test equipment to your PC using Windows Explorer
Open Legacy Files	Open DAT files captured with Hand Held Software Tools v6.61
Open Current Files	Open VNA or DAT files
Capture Plots To	The Line Sweep Tools screen, DAT files, Database, or JPEG

**Traces**

Trace Types	Return Loss, VSWR, DTF-RL, DTF-VSWR, Cable Loss, and Smith Chart
Trace Formats	DAT, VNA, CSV, PNG, BMP, JPG, HTML, Data Base, and PDF

**Report Generation**

Report Generator	Includes GPS location along with measurements
Report Format	Create reports in HTML or PDF format
Report Setup	Report Title, Company, Prepared for, Location, Date and Time, Filename, Company logo
Trace Setup	1 Trace Portrait Mode, 2 Trace Portrait Mode, 1 Trace Landscape Mode

**Trace Validation**

Presets	7 presets allow “one click” setting of up to 6 markers and one limit line
Marker Controls	6 regular Markers, Marker Peak, Marker Valley, Marker between, and frequency entry
Delta Markers	6 Delta markers
Limit Line	Enable and drag or value entry. Also works with presets
Next Trace Button	Next Trace and Previous trace arrow keys allow quick switching between traces

**Tools**

Cable Editor	Allows creation of custom cable parameters
Distance to Fault	Converts a Return Loss trace to a Distance to Fault trace
Measurement Calculator	Converts Real, Imaginary, Magnitude, Phase, RL, VSWR, Rho, and Transmit power
Signal Standard Editor	Creates new band and channel tables
Renaming Grid	36 user definable phrases for creation of file names, trace titles, and trace subtitles

**Connectivity**

Connections	Ethernet, USB cable, USB memory stick
-------------	---------------------------------------

 **easyTest Tools™** (for your PC)

**Instrument Modes**


Cable & Antenna Analyzer
Spectrum Analyzer

**Commands**

Display Image	Allows putting a custom image on the instrument screen
Recall Setup	Places the instrument into a known state; auto-advance to next command available
Prompt	Displays instructional messages on the instrument screen; timed advance to next command available; instrument users can be allowed or disallowed from making setup adjustments
Save	Allows automatic or manual saving of traces; auto-advance to next command available

**Connectivity**

Connections	Ethernet, USB cable, USB memory stick
-------------	---------------------------------------

 **easyMap Tools™** (create instrument-compatible maps on your PC)

**Outdoor Maps**

On-Line Sources	Google Maps, Cloud Made Open-Source Maps
Pan & Zoom Mode	AZM map file format allows pan and zoom on-instrument
Legacy Mode	MAP format is compatible with older firmware
Geo-Referenced	Works with instrument based GPS
Map Conversion	Convert scanned maps to geo-referenced

**Indoor Maps**

Sources	Scanned images in JPG, JPEG, JPE, JFIF, GIF, TIF, TIFF, PNG
---------	---

**General**

Color Filter	Grayscale, High Contrast
Coverage	Worldwide
Zoom Levels	16 total zoom levels, 7 available in any one map
Map Size	Less than 1 MB to over 1 GB

 **Master Software Tools** (for your PC)

**Measurement Viewing**

Display	Modify display settings, including scale
Spectrum Traces	Add, delete, and modify limit lines and markers. Overlay traces.
Spectrum Analyzer Measurements	Field Strength, Occupied Bandwidth, Channel Power, ACPR, Emission Mask, C/I <sup>1</sup>
Interference Analyzer Measurements	Spectrograms, Signal Strength Meter, RSSI <sup>2</sup>
Non-Spectrum Measurements	Hi Accuracy Power Meter, Channel Scanner, GSM, WCDMA/HSPA, LTE, TD-LTE, TD-SCDMA, CDMA, EV-DO, Fixed WiMAX, Mobile WiMAX, Screen captures (JPEGs)
	1. Spurious Emissions results viewable in a browser
	2. Coverage Mapping and Interference Mapping files viewable in spreadsheet, Google Earth, or Google Maps

**Database Management**

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory (limited to approximately 15,000 files)
Trace Catalog	Index all traces in selected folder & subfolder on PC into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files

**Data Analysis**

Trace Math and Smoothing	Compare multiple traces
Measurement Calculator	Translate into other units

**Report Generation**

Report Generator	Includes GPS, power level, and measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML
Export Measurements	Export measurements or entire folders to *.jpg or *.csv format
Notes	Annotate measurements

**Mapping** (GPS required on instrument)

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA, LTE OTA Options	Google Earth, Google Maps, MapPoint

**Spectrogram** (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

Source	Recorded Spectrogram or multiple spectrum traces
Folder Spectrogram	2D View creates a composite file of multiple traces
Available Displays	Spectrogram, Peak Power vs. Time, Variation in Total Power vs. Time, Peak Frequency vs. Time, Number of Traces Saved vs. Time (useful with Save on Limit Exceeded), Maximum/Average/Minimum Power vs. Time File Filter (Violations over limit lines or deviations from averages) Playback
Display Functions per Trace	Markers, GPS location altitude and time (when recorded), instrument time Filename per trace for Folder Spectrogram
Export to Video	Create AVI file of 2D Spectrogram for management review/reports
Export to 3D Spectrogram	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

**List/Parameter Editors**

Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
Script Master	Create Script Master files for GSM/WCDMA or Channel Scanner
Languages	Modify non-English language menus
Mobile WiMAX	DL-MAP Parameters

**Connectivity**

Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Network Search	Find all Anritsu handheld instruments on local network
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements and other files from PC to instrument
Export	Measurements can be saved in various formats, depending on the measurement type, including JPEG, CSV, and Anritsu DAT format
Printing	Print individual or all measurement screens





















**Web Remote Control** (enabled with Option 413)

Control	Full instrument control through a browser – all instrument functions except power switch and rotary knob
Connections	RJ45 Ethernet jack Third party Wi-Fi router
Protocol	HTTP/TCP/IP
Physical Layer	Cat 5 Cable, Wi-Fi router compatible
Software Required	HTML 5-compliant browser – Google Chrome, Mozilla Firefox
Operating System	iOS, Windows, Linux, Android operating systems that can host the HTML 5-compliant browser
Remote Hardware	PCs, tablets, and smart phones with Ethernet or Wi-Fi connection and an HTML 5-compliant browser
Download	Individual instrument files downloaded via browser Multiple instrument files and directories zipped and downloaded via browser File downloads are not supported by iOS Screen capture capability
Display Modes	Normal: All modes and displays supported Fast: Spectrum traces update faster (up to 5 updates per second)
Password	The instrument can be password protected Passwords may be used to manage who is controlling the instrument
Users/Instruments	One user/device can view and control many instruments

**Programmable Remote Control**

Functionality	Many instrument functions are programmable. See the Programming Manual for details.
Programming Language	Standard Commands for Programmable Instruments (SCPI)
Interfaces	USB, Ethernet
Available Drivers	LabView. Visit NI.com for driver

Ordering Information – Options

	MT8213E	Description
	2 MHz to 6 GHz	Cable and Antenna Analyzer
	9 kHz to 6 GHz	Spectrum Analyzer
	10 MHz to 6 GHz	Power Meter
	Options	
	MT8213E-0021	2-Port Transmission Measurement
	MT8213E-0010	Bias-Tee
	MT8213E-0031	GPS Receiver (requires Antenna)
	MT8213E-0019	High-Accuracy Power Meter (requires External Power Sensor)
	MT8213E-0025	Interference Analyzer (Option 31 recommended)
	MT8213E-0027	Channel Scanner
	MT8213E-0431	Coverage Mapping (requires Option 31)
	MT8213E-0444	EMF Measurements (requires Anritsu Isotropic Antenna)
	MT8213E-0090	Gated Sweep
	MT8213E-0028	C/W Signal Generator (requires CW Signal Generator Kit, P/N 69793)
	MT8213E-0752	CPRI LTE RF Measurements (requires Option 759)
	MT8213E-0753	OBSAI LTE RF Measurements (requires Option 759)
	MT8213E-0759	RF over Fiber Hardware (requires Option 752 or 753, cannot be ordered with Option 57, or 79)
	MT8213E-0880	GSM/GPRS/EDGE Measurements
	MT8213E-0881	W-CDMA/HSPA+ Measurements (Option 31 recommended.)
	MT8213E-0882	TD-SCDMA/HSPA+ Measurements (requires Option 31 for full functionality)
	MT8213E-0883	LTE/LTE-A FDD/TDD Measurements (requires Option 31 for full functionality)
	MT8213E-0886	LTE 256QAM Demodulation (requires Option 883)
	MT8213E-0887	NB-IoT Measurements
	MT8213E-0884	CDMA/EV-DO Measurements (requires Option 31 for full functionality)
	MT8213E-0885	WiMAX Fixed/Mobile Measurements (requires Option 31 for full functionality)
	MT8213E-0030	ISDB-T Digital Video Measurements
	MT8213E-0032	ISDB-T SFN Measurements
	MT8213E-0079	ISDB-T BER Measurements (requires Option 30; cannot be ordered with Option 759)
	MT8213E-0064	DVB-T/H Digital Video Measurements
	MT8213E-0078	DVB-T/H SFN Measurements
	MT8213E-0057	DVB-T/H BER Measurements (requires Option 64; cannot be ordered with Option 759)
	MT8213E-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate.
	MT8213E-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate, test report, and uncertainty data.

**Standard Accessories** (included with instrument)




Part Number	Description
2000-1371-R	Ethernet Cable, 7 ft (213 cm)
2000-1654-R	Soft Carrying Case
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Touchscreen Protective Film, 8.4 in
633-75	Rechargeable Li-Ion Battery, 7500 mAh
40-187-R	AC-DC Adapter
806-141-R	Automotive Power Adapter, 12 VDC, 60 W
3-2000-1498	USB A/5-pin mini-B Cable, 10 ft/305 cm

**Manuals** (available at [www.anritsu.com](http://www.anritsu.com))

Part Number	Description
10100-00065	Product Information, Compliance, and Safety
10580-00250	Cell Master User Guide
10580-00241	Cable and Antenna Analyzer Measurement Guide
10580-00242	2-Port Transmission Measurement
10580-00349	Spectrum Analyzer Measurement Guide
10580-00240	Power Meter Measurement Guide
10580-00234	3GPP Signal Analyzer Measurement Guide
10580-00235	3GPP2 Signal Analyzer Measurement Guide
10580-00236	WiMAX Signal Analyzer Measurement Guide
10580-00237	Digital TV Measurement Guide
10580-00238	Backhaul Analyzer Measurement Guide
10580-00415	CPRI LTE RF Analyzer Measurement Guide
10580-00434	OBSAI LTE RF Analyzer Measurement Guide
10580-00455	EMF Measurement Guide
10580-00256	Programming Manual

**Troubleshooting Guides** (available at [www.anritsu.com](http://www.anritsu.com))

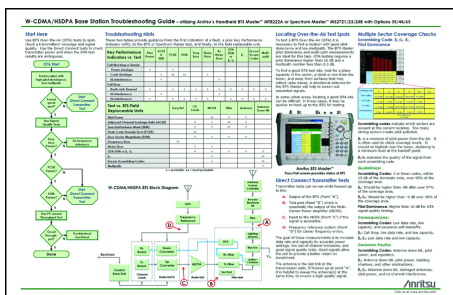

Part Number	Description
11410-00473	Cable, Antenna and Components
11410-00551	Spectrum Analyzers
11410-00472	Interference
11410-00566	LTE eNodeB Testing
11410-00615	TD-LTE eNodeB Testing
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00463	W-CDMA/HSDPA Base Stations
11410-00465	TD-SCDMA/HSDPA Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations
11410-00552	T1/DS1 Backhaul Testing
11410-00553	E1 Backhaul Testing

**Power Sensors** (for complete ordering information, see the respective data sheets of each sensor)



Model Number	Description
MA24105A	Inline Peak Power Sensor, 350 MHz to 4 GHz, +3 dBm to +51.76 dBm
MA24106A	RF USB Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm
MA24208A	Microwave Universal USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24218A	Microwave Universal USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24330A	Microwave CW USB Power Sensor, 10 MHz to 33 GHz, +20 dBm
MA24340A	Microwave CW USB Power Sensor, 10 MHz to 40 GHz, +20 dBm
MA24350A	Microwave CW USB Power Sensor, 10 MHz to 50 GHz, +20 dBm
MA25100A	RF Power Indicator

Optional Accessories

Calibration Components, 50 Ω



Part Number	Description
ICN50B	InstaCal™ Calibration Module, 38 dB, 2 MHz to 6.0 GHz, N(m), 50 Ω
OSLN50A-8	High Performance Type N(m), DC to 8 GHz, 50 Ω
OSLNF50A-8	High Performance Type N(f), DC to 8 GHz, 50 Ω
2000-1914-R	Precision Open/Short/Load, 4.3-10(f), DC to 6 GHz, 50 Ω
2000-1915-R	Precision Open/Short/Load, 4.3-10(m), DC to 6 GHz, 50 Ω
2000-1618-R	Precision Open/Short/Load, 7/16 DIN(m), DC to 6.0 GHz, 50 Ω
2000-1619-R	Precision Open/Short/Load, 7/16 DIN(f), DC to 6.0 GHz, 50 Ω
22N50	Open/Short, N(m), DC to 18 GHz, 50 Ω
22NF50	Open/Short, N(f), DC to 18 GHz, 50 Ω
SM/PL-1	Precision Load, N(m), 42 dB, 6.0 GHz, 50 Ω
SM/PLNF-1	Precision Load, N(f), 42 dB, 6.0 GHz, 50 Ω

Calibration Components, 75 Ω



Part Number	Description
22N75	Open/Short, N(m), DC to 3 GHz, 75 Ω
22NF75	Open/Short, N(f), DC to 3 GHz, 75 Ω
26N75A	Precision Termination, N(m), DC to 3 GHz, 75 Ω
26NF75A	Precision Termination, N(f), DC to 3 GHz, 75 Ω
12N50-75B	Matching Pad, DC to 3 GHz, 50 Ω to 75 Ω

Adapters



Part Number	Description
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172-R	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
1091-417-R	N(m) to QMA(f), DC to 6 GHz, 50 Ω
1091-418-R	N(m) to QMA(m), DC to 18 GHz, 50 Ω
1091-465-R	Adapter, DC to 6 GHz, 4.3-10(f) to N(f), 50 Ω
1091-467-R	Adapter, DC to 6 GHz, 4.3-10(m) to N(f), 50 Ω
510-90-R	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
510-91-R	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
510-92-R	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
510-93-R	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
510-96-R	7/16 DIN(m) to 7/16 DIN (m), DC to 7.5 GHz, 50 Ω
510-97-R	7/16 DIN(f) to 7/16 DIN (f), DC to 7.5 GHz, 50 Ω
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

Precision Adapters



Part Number	Description
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NNF50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

Backpack and Transit Case



Part Number	Description
67135	Anritsu Backpack (for Handheld Instrument and PC)
760-243-R	Large Transit Case with Wheels and Handle 56 cm x 45.5 cm x 26.5 cm (22.07" x 17.92" x 10.42")
760-261-R	Large Transit Case with Wheels and Handle 63.1 cm x 50 cm x 30 cm (24.83" x 19.69" x 11.88"), space for MA2700A, antennas, filters, instrument inside soft case, and other interference hunting accessories/tools
760-262-R	Transit Case for MA2700A, several Yagi antennas and filters
760-271-R	Transit Case for Portable Directional Antennas and Port Extender 52.4 cm x 42.8 cm x 20.6 cm (20.62" x 16.87" x 8.12") (for 2000-1777-R, 2000-1778-R, 2000-1779-R, 2000-1798-R)
760-286-R	Compact Transit Case with Wheels and Handle 55.6 cm x 35.5 cm x 22.9 cm (21.89" x 13.98" x 9.01")

Optional Accessories (continued)

Miscellaneous Accessories



Part Number	Description
2000-1374	External Dual Charger for Li-Ion Batteries
633-75	Rechargeable Li-Ion Battery, 7500 mAh
69793	CW Signal Generator Kit
2000-1689-R	EMI Near Field Probe Kit
MA2700A	Handheld Interference Hunter (For full specifications, refer to the MA2700A Technical Data Sheet 11410-00692)
2000-1884-R	PIM Hunter™ Test Probe (For full specifications, refer to the 2000-1884-R Technical Data Sheet 11410-00999)
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Touchscreen Protective Film, 8.4 in
2000-1798-R	Port Extender, DC to 6 GHz, N(m) to N(f)
66864	Rack Mount Kit, Master Platform

Filters



Part Number	Description
1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz, N(m) to N(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz, N(m) to N(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz, N(m) to N(f), 50 Ω
1030-149-R	High Pass, 150 MHz, N(m) to N(f), 50 Ω
1030-150-R	High Pass, 400 MHz, N(m) to N(f), 50 Ω
1030-151-R	High Pass, 700 MHz, N(m) to N(f), 50 Ω
1030-152-R	Low Pass, 200 MHz, N(m) to N(f), 50 Ω
1030-153-R	Low Pass, 550 MHz, N(m) to N(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω
1030-178-R	1920 MHz to 1980 MHz, N(m) to N(f), 50 Ω
1030-179-R	777 MHz to 798 MHz, N(m) to N(f), 50 Ω
1030-180-R	2500 MHz to 2570 MHz, N(m) to N(f), 50 Ω
2000-1684-R	791 MHz to 821 MHz, N(m) to N(f), 50 Ω
2000-1734-R	Bandpass Filter, 699 MHz to 715 MHz, N(m) and N(f), 50 Ω
2000-1735-R	Bandpass Filter, 776 MHz to 788 MHz, N(m) and N(f), 50 Ω
2000-1736-R	Bandpass Filter, 815 MHz to 850 MHz, N(m) and N(f), 50 Ω
2000-1737-R	Bandpass Filter, 1711 MHz to 1756 MHz, N(m) and N(f), 50 Ω
2000-1738-R	Bandpass Filter, 1850 MHz to 1910 MHz, N(m) and N(f), 50 Ω
2000-1739-R	Bandpass Filter, 880 MHz to 915 MHz, N(m) and N(f), 50 Ω
2000-1740-R	Bandpass Filter, 1710 MHz to 1785 MHz, N(m) and N(f), 50 Ω
2000-1741-R	Bandpass Filter, 1920 MHz to 1980 MHz, N(m) and N(f), 50 Ω
2000-1742-R	Bandpass Filter, 832 MHz to 862 MHz, N(m) and N(f), 50 Ω
2000-1743-R	Bandpass Filter, 2500 MHz to 2570 MHz, N(m) and N(f), 50 Ω
2000-1799-R	Bandpass Filter, 2305 MHz to 2320 MHz, N(m) and N(f), 50 Ω
2000-1911-R	Bandpass Filter, 703 MHz to 748 MHz, N(m) and N(f), 50 Ω
2000-1912-R	Bandpass Filter, 788 MHz to 798 MHz, N(m) and N(f), 50 Ω
2000-1925-R	Bandpass Filter, 663 MHz to 698 MHz, N(m) and N(f), 50 Ω
2000-1926-R	Bandpass Filter, 776 MHz to 806 MHz, N(m) and N(f), 50 Ω

Attenuators



Part Number	Description
3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)



Optional Accessories (continued)

**Phase-Stable Test Port Cables, Armored w/Reinforced Grip** (recommended for cable & antenna line sweep applications)



Part Number	Description
15RNFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15RNFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω

**Interchangeable Adaptor Phase Stable Test Port Cables, Armored w/Reinforced Grip** (recommended for cable and antenna line sweep applications. It uses the same ruggedized grip as the Reinforced grip series cables. Now you can also change the adaptor interface on the grip to four different connector types.)



Part Number	Description
15RCN50-1.5-R	1.5 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω
15RCN50-3.0-R	3.0 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω

**Phase-Stable Test Port Cables, Armored** (recommended for use with tightly spaced connectors and other general purpose applications)



Part Number	Description
15NNF50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NDF50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15ND50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15NNF50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NNF50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15N43M50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6GHz, N(m) to 4.3-10(m)
15N43F50-1.5C	Test Port Extension Cable, Armored, 1.5 meter, DC to 6GHz, N(m) to 4.3-10(f)
15N43M50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(m) to 4.3-10(m)
15N43F50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(m) to 4.3-10(f)
15NF43M50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6 GHz, N(f) to 4.3-10(m)
15NF43F50-1.5C	Test Port Extension Cable, Armored, 1.5 meters, DC to 6 GHz, N(f) to 4.3-10(f)
15NF43M50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(f) to 4.3-10(m)
15NF43F50-3.0C	Test Port Extension Cable, Armored, 3 meters, DC to 6 GHz, N(f) to 4.3-10(f)

Optional Accessories (continued)

RF over Fiber Accessories




Part Number	Description
67-12-R	Optical Tap; Single Mode/Multi Mode 80/20 Tap
67-13-R	Optical Tap; Single Mode 80/20 Tap
67-14-R	Optical Tap; Single Mode/Multi Mode 50/50 Tap
67-15-R	Optical Tap; Single Mode 50/50 Tap
68-5-R	SFP (Optical Module), MM (Multi Mode) 4.25 Gbps, 850 nm, 500 m
68-6-R	SFP+ (Optical Module), MM (Multi Mode) 8 Gbps FC/10G SR 850 nm
68-7-R	SFP (Optical Module), SM (Single Mode) 2.7 Gbps, 1310 nm, 15 km
68-8-R	SFP+ (Optical Module), SM (Single Mode) 10 Gbps LR, 1310 nm
68-9-R	SFP (Optical Module), SM (Single Mode) 3.07 Gbps, 1310 nm
68-10-R	SFP (Optical Module), MM (Multi Mode) 3.7 Gbps, 850 nm
68-11-R	SFP+ (Optical Module), SM (Single Mode) 10.5 Gbps, 1310 nm
68-12-R	SFP+ (Optical Module), MM (Multi Mode) 10.5 Gbps, 850 nm
68-16-R	SFP+ (Optical Module), SM (Single Mode) 9.83 Gbps, 1310 nm
808-16-R	Fiber Optic Cable, 3 m, Duplex MM (Multi Mode) 1.6 mm LC/PC LC/PC 50 μm
808-17-R	Fiber Optic Cable, 3 m, Simplex MM (Multi Mode) 1.6 mm LC/UPC LC/UPC 50 μm
808-18-R	Fiber Optic Cable, 3 m, Ruggedized Simplex SM (Single Mode) LC/UPC LC/UPC
808-19-R	Fiber Optic Cable, 3 m, Ruggedized Duplex SM (Single Mode) LC/UPC LC/UPC
2100-29-R	Fiber Optic Cable, 3 m, Simplex SM (Single Mode) LC/UPC
2100-30-R	Fiber Optic Cable, 10 m, Simplex MM (Multi Mode) LC-SC
2100-31-R	Fiber Optic Cable, 3 m, Duplex SM (Single Mode) LC/UPC
971-14-R	Ferrule Cleaner, 2.5 mm SC
971-15-R	Ferrule Cleaner, 1.25 mm LC
971-16	Fiber Ferrule Cleaner
2000-1849-R	SFP 4-slot ESD Box

Directional Antennas



Part Number	Description
2000-1411-R	824 MHz to 896 MHz, N(f), 12.3 dBi, Yagi
2000-1412-R	885 MHz to 975 MHz, N(f), 12.6 dBi, Yagi
2000-1413-R	1710 MHz to 1880 MHz, N(f), 12.3 dBi, Yagi
2000-1414-R	1850 MHz to 1990 MHz, N(f), 11.4 dBi, Yagi
2000-1415-R	2400 MHz to 2500 MHz, N(f), 14.1 dBi, Yagi
2000-1416-R	1920 MHz to 2170 MHz, N(f), 14.3 dBi, Yagi
2000-1659-R	698 MHz to 787 MHz, N(f), 10.1 dBi, Yagi
2000-1660-R	1425 MHz to 1535 MHz, N(f), 14.3 dBi, Yagi
2000-1715-R	Directional Antenna, 698 MHz to 2500 MHz, N(f), gain of 2 dBi to 10 dBi, typical
2000-1726-R	Antenna, 2500 MHz to 2700 MHz, N(f), 14.1 dBi, Yagi
2000-1747-R	Antenna, Log Periodic, 300 MHz to 7000 MHz, N(f), 5.1 dBi, typical
2000-1748-R	Antenna, Log Periodic, 1 GHz to 18 GHz, N(f), 6 dBi, typical
2000-1777-R	Portable Directional Antenna, 9 kHz to 20 MHz, N(f)
2000-1778-R	Portable Directional Antenna, 20 MHz to 200 MHz, N(f)
2000-1779-R	Portable Directional Antenna, 200 MHz to 500 MHz, N(f)
2000-1812-R	Portable Yagi Antenna, 450 MHz to 512 MHz, N(f), 7.1 dBi
2000-1825-R	Portable Yagi Antenna, 380 MHz to 430 MHz, N(f), 7.1 dBi

Isotropic Antennas

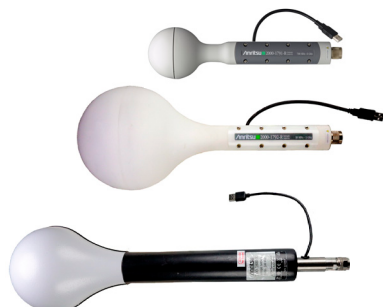

Part Number	Description
2000-1791-R	Isotropic Antenna, 700 MHz to 6000 MHz, N(m)
2000-1792-R	Isotropic Antenna, 30 MHz to 3000 MHz, N(m)
2000-1800-R	Isotropic Antenna, 9 kHz to 300 MHz, N(m)

Optional Accessories (continued)

Portable Antennas




Part Number	Description
2000-1200-R	806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473-R	870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035-R	896 MHz to 941 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1030-R	1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474-R	1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031-R	1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475-R	1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
2000-1032-R	2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361-R	2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1636-R	Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)
2000-1751-R	Dipole, 698-960/1710-2170/2500-2700 MHz, SMA(m), 2 dBi, typical, 50 Ω

GPS Antennas




Part Number	Description
2000-1528-R	GPS Antenna, SMA(m) with 5 m (15 ft) cable, 3 dBi gain, requires 5 VDC
2000-1652-R	GPS Antenna, SMA(m) with 0.3 m (1 ft) cable, 5 dBi gain, requires 3.3 VDC or 5 VDC
2000-1760-R	GPS Antenna, SMA(m), 25 dB gain, 2.5 VDC to 3.7 VDC

Mag Mount and Broadband Antennas

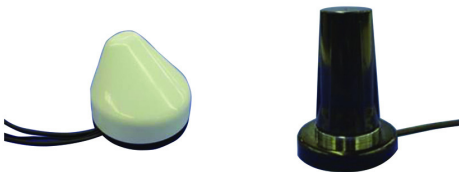

Part Number	Description
2000-1616-R	20 MHz to 21000 MHz, N(f), 50 Ω
2000-1645-R	694 MHz to 894 MHz 3 dBi peak gain, 1700 MHz to 2700 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft
2000-1646-R	750 MHz to 1250 MHz 3 dBi peak gain, 1650 MHz to 2700 MHz 5 dBi peak gain
2000-1647-R	Cable 1: 698 MHz to 1200 MHz, 2 dBi peak gain, 1700 MHz to 2700 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft
2000-1648-R	1700 MHz to 6000 MHz 3 dBi peak gain, N(m), 50 Ω, 10 ft

NEON® MA8100A Signal Mapper

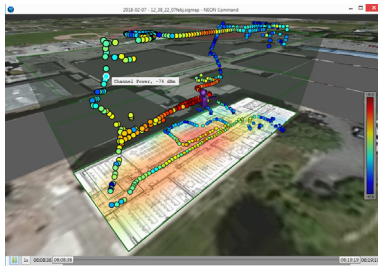

Model Number	Description
MA8100A-001	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service.
MA8100A-003	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
MA8100A-005	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service.
MA8100A-100	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
2300-606	Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service. Part number can also be used to order a perpetual license after a limited term license has expired.
2300-612	Renewal of 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service.
2300-613	Renewal of 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service.
2300-614	Renewal of 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service.

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

**Anritsu Americas Sales Company**  
450 Century Parkway, Suite 190  
Allen, TX 75013, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

**Anritsu Electronics Ltd.**  
700 Silver Seven Road, Suite 120  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

**Anritsu Eletronica Ltda.**  
Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP  
Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

**Anritsu Company, S.A. de C.V.**  
Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

**Anritsu EMEA L td.**  
200 Capability Green  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

**Anritsu S.A.**  
12 avenue du Québec, Bâtiment Iris 1- Silic 612,  
91140 Villebon-sur-Yvette, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

**Anritsu GmbH**  
Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

**Anritsu S.r.l.**  
Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

List Revision Date: 20181114

### • Sweden

**Anritsu AB**  
Isafjordsgatan 32C  
164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

**Anritsu AB**  
Teknobulevardi 3-5  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

**Anritsu A/S**  
Torveporten 2  
2500 Valby, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

### • Russia

**Anritsu EMEA Ltd.**  
**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor  
Moscow 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

**Anritsu EMEA Ltd.**  
**Representation Office in Spain**  
Paseo de la Castellana, 141. Planta 5  
Edificio Cuzco IV  
28046 Madrid, Spain  
Phone: +34-915-726-761  
Fax: +34-915-726-621

### • United Arab Emirates

**Anritsu EMEA Ltd.**  
**Dubai Liaison Office**  
902 Aurora Tower  
P O Box: 500311 - Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

**Anritsu India Private Limited**  
6th Floor, Indiqube ETA, No.38/4  
Adjacent to EMC2, Doddanekundi, Outer Ring Road  
Bengaluru 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

**Anritsu Pte. Ltd.**  
11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

**Anritsu (China) Co., Ltd.**  
Room 2701-2705, Tower A  
New Caohejing International Business Center  
No. 391 Gui Ping Road  
Shanghai 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

**Anritsu Company Ltd.**  
Unit 1006-7, 10/F.  
Greenfield Tower, Concordia Plaza  
No. 1 Science Museum Road  
Tsim Sha Tsui East, Kowloon  
Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

**Anritsu Corporation**  
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

**Anritsu Corporation, Ltd.**  
5FL, 235 Pangyoyeok-ro  
Bundang-gu, Seongnam-si  
Gyeonggi-do 13494, South Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

**Anritsu Pty. Ltd.**  
Unit 20, 21-35 Ricketts Road  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

**Anritsu Company Inc.**  
7F, No. 316, Sec. 1, NeiHu Rd, Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817